
EOSDIS Maintenance and Development Project

Training Material for the EMD Project Volume 5: Archive Processing

Revision --

March 2009

Raytheon Information Solutions Riverdale, Maryland



Training Material for the EMD Project Volume 5: Archive Processing

Revision --

March 2009

Prepared Under Contract NAS5-03098 CDRL Item # 023

Languart Franchic 3/30/3

EOSDIS Maintenance and Development Project

Timothy W. Ortiz, Program Manager

RESPONSIBLE OFFICE

EOSDIS Maintenance and Development Project

Raytheon Information Solutions

Riverdale, Maryland

This page intentionally left blank.

Preface

This document is a formal contract deliverable. It requires Government review and approval within 45 business days. Changes to this document will be made by document change notice (DCN) or by complete revision.

Any questions should be addressed to:

Data Management Office The EMD Project Office Raytheon Information Solutions 5700 Rivertech Court Riverdale, Maryland 20737

Revision History

Document Number	Status/Issue	Publication Date	CCR Number
625-EMD-225	Original	March 2009	09-0073

iii 625-EMD-225

This page intentionally left blank.

iv

Abstract

This is Volume 5 of a series of lessons containing the training material for the Earth Observing System Data and Information System (EOSDIS) Maintenance and Development (EMD) Project. This lesson provides a detailed description of the process required to perform the tasks associated with archive functions.

Keywords: training, instructional design, course objective, archive, granule deletion tool, Spatial Subscription Server, Data Pool, Data Pool maintenance, Release 7.22

 \mathbf{v}

This page intentionally left blank.

Contents

Preface

Abstract

Contents

Introduction

Identification	1
Scope	
Purpose	
Status and Schedule	
Organization	1
Related Documentation	
Parent Documents	3
Applicable Documents	3
Information Documents	3
Information Documents Referenced	3
Information Documents Not Referenced	4
Archive Processing Overview	
Lesson Overview	5
Lesson Objectives	5
Importance	8
Slide Presentation	
Slide Presentation Description	9

vii 625-EMD-225

This page intentionally left blank.

Introduction

Identification

Training Material Volume 5 is part of Contract Data Requirements List (CDRL) Item 23, which is a required deliverable under the Earth Observing System Data and Information System (EOSDIS) Maintenance and Development (EMD) Contract (NAS5-03098).

Scope

Training Material Volume 5 describes the process and procedures associated with Archive Processing. It describes archive hardware, software, and data. In addition, it addresses starting and shutting down the tape archive control software, monitoring archive requests, and performing archive management tasks. This lesson is designed to provide the operations staff with sufficient knowledge and information to satisfy all lesson objectives.

Purpose

The purpose of this Student Guide is to provide a detailed course of instruction that forms the basis for understanding data archiving. Lesson objectives are developed and will be used to guide the flow of instruction for this lesson. The lesson objectives will serve as the basis for verifying that all lesson topics are contained within this Student Guide and slide presentation material.

Status and Schedule

This lesson module provides detailed information about training for the current baseline of the system. Revisions are submitted as needed.

Organization

This document is organized as follows:

Introduction: The Introduction presents the document identification, scope,

purpose, and organization.

Related Documentation: Related Documentation identifies parent, applicable and

information documents associated with this document.

Student Guide: The Student Guide identifies the core elements of this lesson. All

1

Lesson Objectives and associated topics are included. Slide Presentation is reserved for all slides used by the instructor during

the presentation of this lesson.

This page intentionally left blank.

Related Documentation

Parent Documents

The parent documents are the documents from which the EMD Training Material's scope and content are derived.

423-41-01	Goddard Space Flight Center, EOSDIS Core System (ECS) Statement of Work
423-46-03	EMD Task 101 Statement of Work For ECS SDPS Maintenance
423-46-02	Contract Data Requirements Document for EMD Task 101 ECS SDPS Maintenance

Applicable Documents

The following documents are referenced within this EMD Training Material, or are directly applicable, or contain policies or other directive matters that are binding upon the content of this document:

420-05-03	Goddard Space Flight Center, Earth Observing System (EOS) Performance Assurance Requirements for the EOSDIS Core System (ECS)
423-41-02	Goddard Space Flight Center, Functional and Performance Requirements Specification for the Earth Observing System Data and Information System (EOSDIS) Core System (ECS) (ECS F&PRS)
423-46-01	Goddard Space Flight Center, Functional and Performance Requirements Specification for the Earth Observing System Data and Information System (EOSDIS) Core System (ECS) Science Data Processing System (EMD F&PRS)

Information Documents

Information Documents Referenced

The following documents are referenced herein and amplify or clarify the information presented in this document. These documents are not binding on the content of the EMD Training Material.

609-EMD-220	Release 7.22 Operations Tools Manual for the EMD Project
611-EMD-220	Release 7.22 Mission Operation Procedures for the EMD Project

3 625-EMD-225

Information Documents Not Referenced

The following documents, although not referenced herein and/or not directly applicable, do amplify or clarify the information presented in this document. These documents are not binding on the content of the EMD Training Material.

305-EMD-220	Release 7.22 Segment/Design Specifications for the EMD Project.
311-EMD-220	Release 7.22 INGEST (INS) Database Design and Schema Specifications for the EMD Project.
311-EMD-224	Release 7.22 Order Manager Database Design and Database Schema Specifications for the EMD Project.
311-EMD-225	Release 7.22 Spatial Subscription Server (SSS) Database Design and Schema Specifications for the EMD Project.
311-EMD-226	Release 7.22 Data Pool Database Design and Schema Specifications for the EMD Project.
311-EMD-227	Release 7.22 Archive Inventory Management (AIM) Database Design and Schema Specifications for the EMD Project.

4 625-EMD-225

Archive Processing Overview

Lesson Overview

This lesson reviews the process of archiving data, including a description of processing for working with the StorNext Storage Manager (SNSM) software, monitoring the ingest/archiving/distribution performance, managing archive content and capacity, maintaining configuration of peripherals and data servers, backing up and restoring archived data, documenting and troubleshooting archive errors, maintaining the archive processing queue (storage and retrieval), and providing archive status.

Lesson Objectives

Overall Objective - The overall objective of this lesson is proficiency in the methodology and procedures for archive processing in the Earth Observing System Data and Information System (EOSDIS) Core System (ECS) during maintenance and operations. The lesson includes a description of processing for monitoring the ingest/archival/distribution performance, maintaining configuration of peripherals and data servers, documenting archive errors, maintaining the archive processing queue (both storing and retrieval), managing archive content and capacity, submitting new data archive requests to the Science Coordinator, and providing archive status.

Specific Objective 1 - The student will list DAAC operator positions for Archive Manager personnel interfaces and identify responsibilities associated with each interface.

Condition - The student will be given a list of DAAC operators.

Standard - The student will select four personnel positions with which the Archive Manager interfaces and list at least one major area of responsibility for each selected position.

Specific Objective 2 - The student will identify the major hardware facility for archival storage, the tape drives, storage networking blades and the associated storage cartridges.

Condition - The student will be given a copy 609-EMD-220, Release 7.22 Operations Tools Manual for the EMD Project, and a copy of 611-EMD-220, Release 7.22 Mission Operation Procedures for the EMD Project, a working system archive facility, and an LTO 4 tape cartridge.

Standard - The student will correctly point out the Quantum Scalar iSeries library, identify the tape drives, storage networking blade and the LTO 4 tape cartridge.

Specific Objective 3 - The student will name the major parts of the Operator's Panel on the Scalar Library and explain how each is used.

Condition - The student will be given a copy of 609-EMD-220, Release 7.22 Operations Tools Manual for the EMD Project, and a copy of 611-EMD-220, Release 7.22 Mission Operation Procedures for the EMD Project.

Standard - The student will identify the Operator's panel, each section, and how each is used.

Specific Objective 4 - The student will describe the StorNext Storage Manager (SNSM) software.

Condition - The student will be given a copy of 609-EMD-220, Release 7.22 Operations Tools Manual for the EMD Project, and a copy of 611-EMD-220, Release 7.22 Mission Operation Procedures for the EMD Project.

Standard - The student will identify the SNSM software as the StorNext File System and the Storage Manager, and correctly describe its host platform as an HP Proliant computer.

Specific Objective 5 - The student will start the StorNext tape archive system.

Condition - The student will be given a copy of 609-EMD-220, Release 7.22 Operations Tools Manual for the EMD Project, and a copy of 611-EMD-220, Release 7.22 Mission Operation Procedures for the EMD Project, and a working system archive facility.

Standard - The student will operate the StorNext control panels, power up the archive hardware, vary the partition online, then boot StorNext host and start StorNext without error and in accordance with documented procedures.

Specific Objective 6 - The student will shut down the StorNext tape archive system.

Condition - The student will be given a copy of 609-EMD-220, Release 7.22 Operations Tools Manual for the EMD Project, and a copy of 611-EMD-220, Release 7.22 Mission Operation Procedures for the EMD Project, and a working system archive facility with StorNext started.

Standard - The student will terminate StorNext and vary the partition offline, and shutdown the library without error and in accordance with documented procedures.

Specific Objective 7 - The student will use manual mode to bring the partition online.

Condition - The student will be given a copy of 609-EMD-220, Release 7.22 Operations Tools Manual for the EMD Project, and a copy of 611-EMD-220, Release 7.22 Mission Operation Procedures for the EMD Project, and a working system archive facility with StorNext started.

Standard - The student will vary the partition offline, and vary the partition back online, without error, in accordance with documented procedures, and following all required safety precautions.

Specific Objective 8 - The student will describe the relationships between Earth Science Data Types (ESDTs), Logical Volume Groups (LVGs) in the Archive, and physical archive volume groups.

Condition - The student will be given a diagram depicting the relationships.

Standard - The student will correctly explain the logical and physical structure of archive storage for the system.

Specific Objective 9 - The student will describe the process of, and monitor the progress of, inserting new data into the archive.

Condition - The student will be given a copy of 609-EMD-220, Release 7.22 Operations Tools Manual for the EMD Project, and a copy of 611-EMD-220, Release 7.22 Mission Operation Procedures for the EMD Project, and a working system archive facility with StorNext started.

Standard - The student will describe without error the process of inserting new data into the archive.

Standard - The student will perform without error and in accordance with documented procedures the procedures relating to monitoring retrieval of data from the archive.

Specific Objective 10 - The student will use the granule deletion capability to delete granules from the archive and inventory.

Condition - The student will be given a copy of 609-EMD-220, Release 7.22 Operations Tools Manual for the EMD Project, and a copy of 611-EMD-220, Release 7.22 Mission Operation Procedures for the EMD Project, and a working system archive facility with StorNext started.

Standard - The student will perform without error and in accordance with documented procedures the procedure for deleting granules from the archive and inventory.

Specific Objective 11 - The student will perform automatic and manual loading of archive storage cartridges.

Condition - The student will be given a copy of 609-EMD-220, Release 7.22 Operations Tools Manual for the EMD Project, and a copy of 611-EMD-220, Release 7.22 Mission Operation Procedures for the EMD Project, a working system archive facility with StorNext started, and tape cartridges.

Standard - The student will perform procedures for automatic and manual loading of the proper cartridges for the library without error and in accordance with documented procedures.

Specific Objective 12 - The student will create a backup for archived data.

Condition - The student will be given a copy of 609-EMD-220, Release 7.22 Operations Tools Manual for the EMD Project, and a copy of 611-EMD-220, Release 7.22 Mission Operation Procedures for the EMD Project, and a working system archive facility with StorNext started.

Standard - The student will correctly and in accordance with documented procedures perform a backup of archived data.

Specific Objective 13 - The student will replace a full Backup Volume.

Condition - The student will be given a copy of 609-EMD-220, Release 7.22 Operations Tools Manual for the EMD Project, and a copy of 611-EMD-220, Release 7.22 Mission Operation Procedures for the EMD Project, and a working system archive facility with StorNext started.

Standard - The student will perform without error and in accordance with documented procedures the procedures for replacing the Backup Volume (Volume 1).

Specific Objective 14 - The student will manually create a replacement backup for an archive data tape.

Condition - The student will be given a copy of 609-EMD-220, Release 7.22 Operations Tools Manual for the EMD Project, and a copy of 611-EMD-220, Release 7.22 Mission Operation Procedures for the EMD Project, and a working system archive facility with StorNext started.

Standard - The student will perform without error and in accordance with documented procedures the procedures for manually creating a replacement backup for an archive data tape.

Specific Objective 15 - The student will "restore" archive data by inserting a backup copy cartridge.

Condition - The student will be given a copy of 609-EMD-220, Release 7.22 Operations Tools Manual for the EMD Project, and a copy of 611-EMD-220, Release 7.22 Mission Operation Procedures for the EMD Project, and a working system archive facility.

Standard - The student will perform without error the procedure for inserting a backup copy cartridge to replace a lost archive data tape.

Specific Objective 16 - The student will display what is in the StorNext queue.

Condition - The student will be given a copy of 609-EMD-220, Release 7.22 Operations Tools Manual for the EMD Project, and a copy of 611-EMD-220, Release 7.22 Mission Operation Procedures for the EMD Project, and a working system archive facility.

Standard - The student will perform without error and in accordance with documented procedures the procedure for viewing what is in the StorNext queue.

Specific Objective 17 - The student will display StorNext messages from the system log file.

Condition - The student will be given a copy of 609-EMD-220, Release 7.22 Operations Tools Manual for the EMD Project, and a copy of 611-EMD-220, Release 7.22 Mission Operation Procedures for the EMD Project, and a working system archive facility.

Standard - The student will perform without error and in accordance with documented procedures the procedure for using the *StorNext_log* script to display StorNext messages from the system log file.

Specific Objective 18 - The student will launch and use the StorNext Graphical User Interface (GUI).

Condition - The student will be given a copy of 609-EMD-220, Release 7.22 Operations Tools Manual for the EMD Project, and a copy of 611-EMD-220, Release 7.22 Mission Operation Procedures for the EMD Project, and a working system archive facility.

Standard - The student will successfully start the StorNext GUI, display icons and data for volume groups and volumes, and execute procedures for modifying volume groups and volumes without error and in accordance with documented procedures.

Specific Objective 19 - The student will perform the functions required to maintain the Data Pool, including tasks with the Data Pool Maintenance (DPM) GUI (monitor Data Pool active insert processes; monitor/cancel data pool insert actions; suspend and resume Data Pool actions; check the Data Pool insert queue; toggle the state of the NoFreeSpace flag; configure the number of allowed active insert processes; configure the default retention period and the default retention priority; view and update collection groups in the Data Pool database; list/add/delete a theme), tasks with utilities and scripts (extend the period of retention for selected science granules already in the Data Pool; set up a schedule and cron job for Data Pool cleanup; manually invoke Data Pool cleanup; set up a schedule and cron job for Data Pool access statistics accumulation; manually invoke the Data Pool access statistics utility), and tasks with the Spatial Subscription Server (NBSRV) GUI; update a subscription; view/add/cancel a bundling order; view statistics on processing of events and actions by the Spatial Subscription Server).

Condition - The student will be given a copy 609-EMD-220, Release 7.22 Operations Tools Manual for the EMD Project, and a copy of 611-EMD-220, Release 7.22 Mission Operation Procedures for the EMD Project, and a working system archive facility.

Standard - The student will use the GUI tools, scripts, and utilities without error in accordance with applicable procedures to perform the required Data Pool maintenance functions.

Importance

The Archive Manager's role in maintaining the archive data is key to the successful implementation and operation of the system. Ensuring the smooth operation of the archive is crucial for system core functionality.

Slide Presentation

Slide Presentation Description

The following slide presentation represents the slides used by the instructor during the conduct of this lesson.

9 625-EMD-225

This page intentionally left blank.




Archive Processing

March 2009

Overview of Lesson

- Introduction
- Archive Processing Topics
 - Archive Hardware and Software
 - Delete Granules
 - Data Pool Management and Maintenance

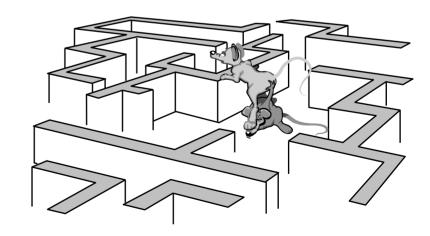

Objectives


- Overall: Proficiency in Archive Processing
 - Describe Archive Manager roles and responsibilities
 - Identify and describe Archive storage resources
 - Describe archive storage element relationships and archive resource management
 - Use Granule Deletion tool to delete granules
 - Delete files from the archive
- Overall: Proficiency in Archive Processing (Cont.)
 - Use GUIs, utilities, and scripts for Data Pool maintenance

Objectives (Cont.)


STANDARDS:

- Lesson content (procedures in the lesson)
- Mission Operation Procedures for the EMD Project (611-EMD-001)

Sources and Uses of Archive Data

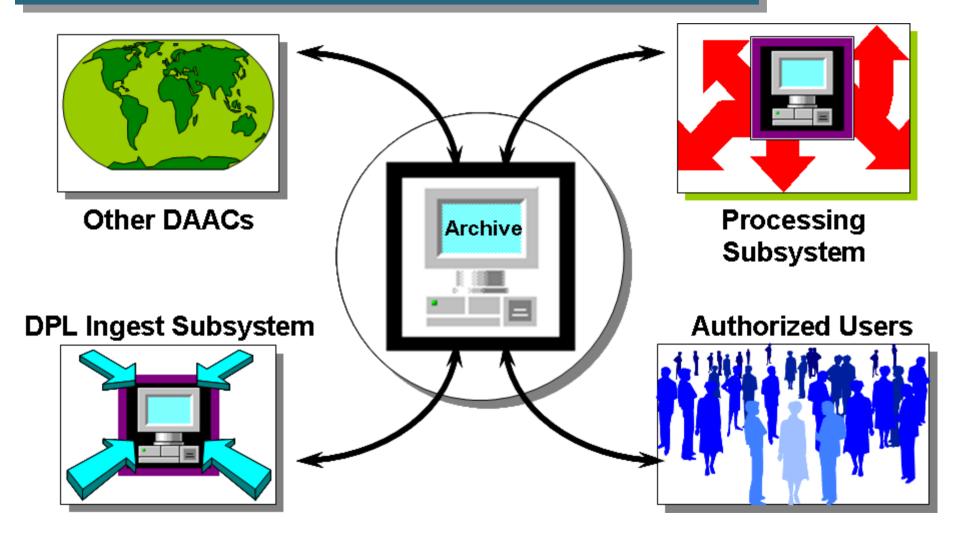

DAAC Archive Manager Interfaces

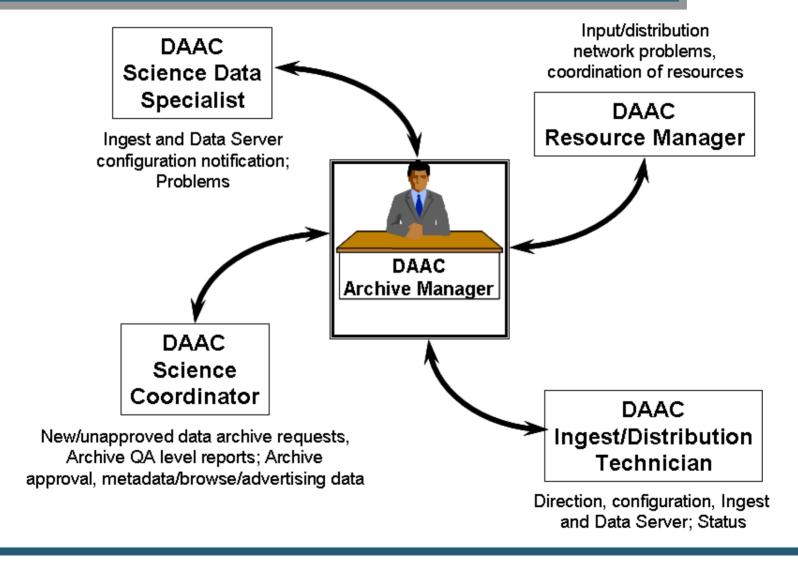

Quantum Scalar i2000 Library



Quantum Scalar i2000 Library




Storage Networking Blades




LTO 4 Tape Drives

Quantum Scalar i500 Library

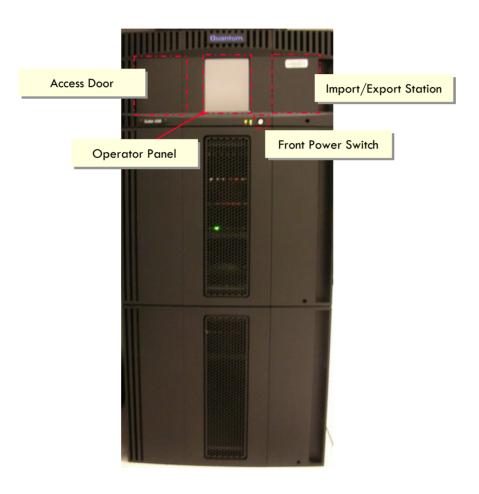

Quantum Scalar i500 Library

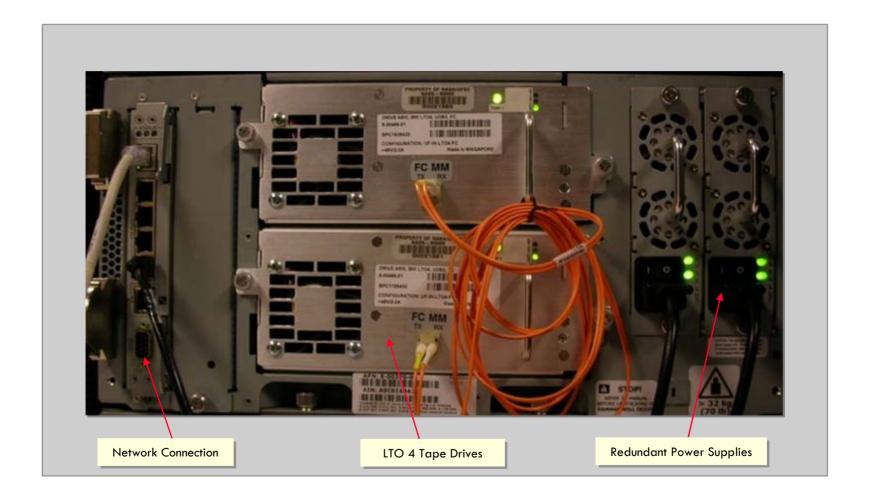


LTO 4 Tape Drives and SN Blades



- 120 MB/sec native transfer rate
- 800GB capacity per cartridge (uncompressed)
- Writes LTO 3 and 4
- Reads LTO 2, 3 and 4


Cleaning Cartridge



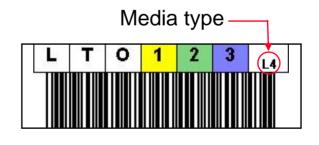


Barcode

Scalar i2000 Operators Panel

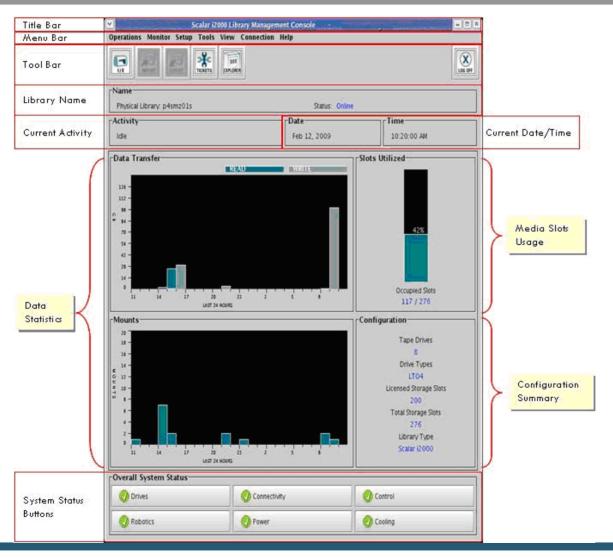

Scalar i500 Operators Panel

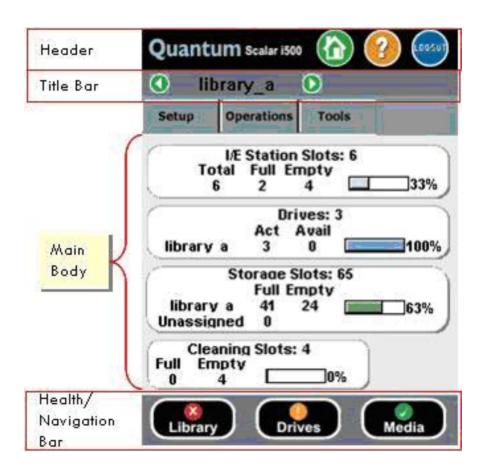

StorNext Application

- Archive operations rely on both custom and commercial off the shelf (COTS) software for complete mass storage archive management, providing the capability to accept Graphical User Interface (GUI) and command line interface inputs, and to interpret them to the appropriate level needed to control and monitor archive operations. The StorNext Storage Manager (SNSM) software is a product of Quantum. Quantum, which acquired ADIC, is the vendor for both the StorNext File System and the StorNext Storage Management products.
- The purpose of SNSM in the system is to provide an easy-to-use interface to a large tape archive. StorNext manages files, volumes (media), drives and jukeboxes. It allows UNIX File System (UFS) access methods to be employed (e.g., ftp, rcp, uucp, nfs, RPC, cp, mv and native commands) while removing some of the limitations of the UFS. Primary among these is reliance on UNIX Index Node (inode) structures. StorNext maintains all inode information in database files rather than in associated disk structures. This minimizes or eliminates many of the file search problems inherent in searching large numbers of files in multiple directories.

StorNext Application

Starting and Stopping StorNext

- The ECS System contains
 - managed (Hierarchal Storage Manager) and
 - unmanaged StorNext File Systems.
 - In order for the ECS System to function properly both must be start/stop.
 - They can be started/stopped from the Linux command line or from the GUI provided by the vendor.

StorNext Application

To start StorNext Manager Server (this must be started first) from the command line prompt: (as superuser or root)

Logon to the active metadata server (x4smvaa). Using x4smvaa log into the active (x4sml01 (primary) or x4sml02 (failover/secondary)

/etc/init.d/cvfs start

Verify that the StorNext Manager Server is active with the command

ps -ef | grep cvfs

To start StorNext Manager Clients from the command line prompt: (as superuser or root)

Logon to each of the clients.

/etc/init.d/cvfs start

Verify that the StorNext Manager Server is active with the command

ps -ef | grep cvfs

StorNext Application

To shutdown the StorNext System, you must stop both the server and its clients. The Clients must all be stopped first.

To Stop the StorNext Clients

 Log in as root (system administrator) into each StorNext Metadata Client.

#/etc/init.d/cvfs stop

Check to ensure client has been stopped

ps -ef | grep cvfs

(NOTE: MAKE SURE THAT ALL CLIENTS ARE STOPPED)


To Stop the StorNext Server

- Log in as root (system administrator) into the active StorNext Metadata Server (x4smvaa).
- To stop StorNext Server, type:
 - # /etc/init.d/cvfs stop
- Check to ensure server has been stopped


ps -ef | grep cvfs

StorNext GUI Home Page

 The StorNext Home Page is Web based, and can be accessed by any Web enabled machine with the proper Java libraries, to start the StorNext Manager and its Clients from the GUI.

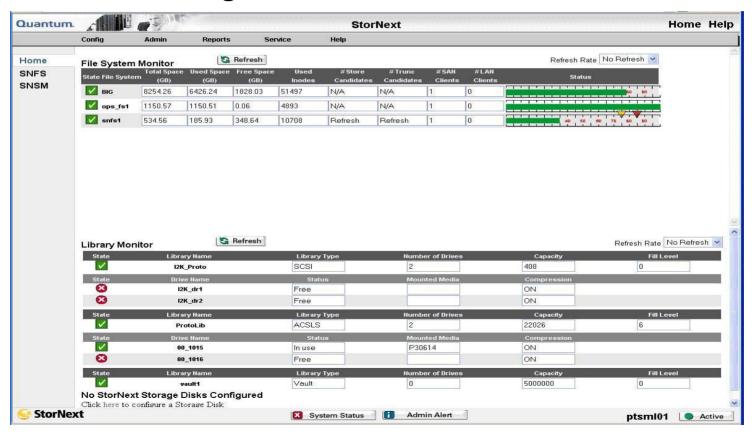

StorNext GUI Admin Drop Down

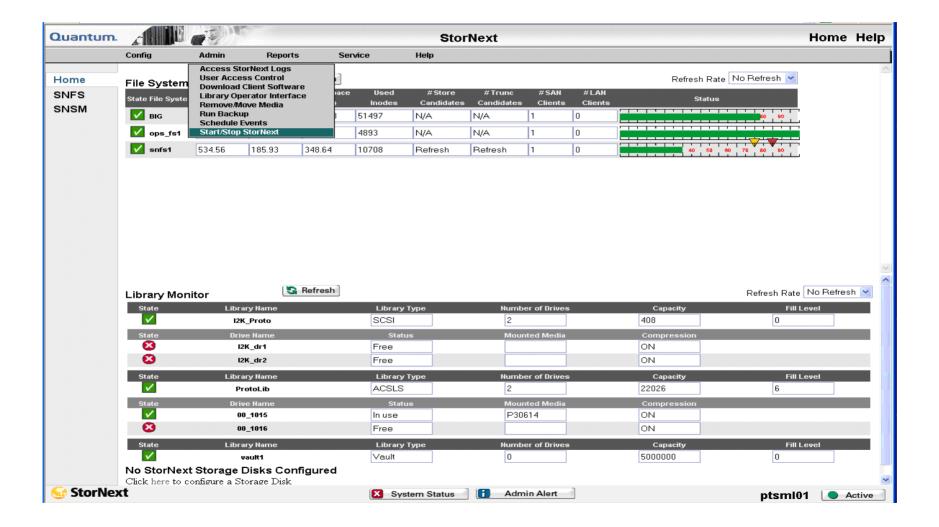

StorNext Stop/Start GUI



Granule Deletion

- Phases of Granule Deletion
 - Logical deletion [marking or flagging granules as "deleted" or as DFA (Delete From Archive) only in the AIM database]
 - Physical deletion [the actual deletion of marked/flagged granules from the inventory database with removal of XML metadata from the Small File Archive and the Science Granules from the Large File Archive]
 - Actual deletion from the inventory of the granules marked for physical deletion (not DFA only)

Granule Deletion (Cont.)

Phase 1, Logical Deletion

- A GeoID file can be created by using a command-line utility (BulkSearch.pl). The GeoID file is the granule identification file used to mark granules for deletion.
- For the first phase, a command-line Bulk Delete utility (EcDsBulkDelete.pl) responds to operator-specified criteria for the deletion of granules by "logically" deleting from the inventory (Inventory database) those granules that meet the criteria

Phase 2, Physical Deletion


– Physical deletion occurs when the operations staff runs the Deletion Cleanup utility (EcDsDeletionCleanup.pl). The utility removes all inventory rows (in the Inventory database) for granules that were flagged as "deleted," including rows referencing related information (e.g., BR, PH, and QA) as well as Granules marked for deletion, the XML file for the granule is removed from the XML Archive, and all data files for the granule are removed from the Large File Archive.

Data Pool Management

- Features of the Data Pool Maintenance GUI
 - Most Archive or support personnel tasks for monitoring and maintaining the Data Pool require the use of the Data Pool Maintenance (DPM) GUI
 - The DPM GUI permits an operator to perform tasks in the following general areas:
 - Monitoring Data Pool Active Insert Processes and Insert Actions
 - Managing Data Pool File Systems
 - Managing Cloud Cover Information
 - Checking the Status of Batch Inserts
 - Checking the Data Pool Insert Queue
 - Managing Data Pool Configuration Parameters and Data Pool Tuning
 - Managing Data Pool Collection Groups
 - Managing Data Pool Collections within Collection Groups

Managing Themes

DPM GUI: Security Login Prompt

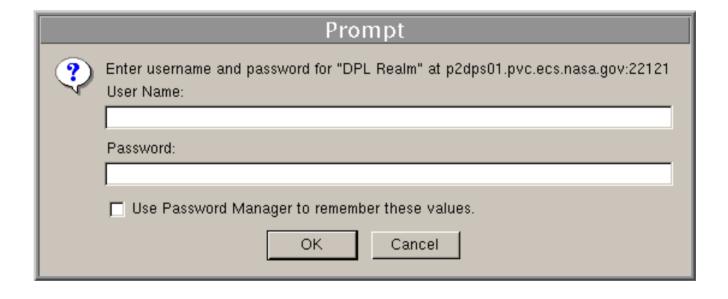


Data Pool Management (Cont.)

- Features of the Data Pool Maintenance GUI (Cont.)
 - Full-capability operators have the ability to configure parameters and perform all other actions that can be accomplished with the DPM GUI
 - Limited-capability operators are able to view a lot of information
 - However, on the limited-capability GUI some buttons and links have been disabled so it is not possible to perform certain actions or access certain pages


Data Pool Management (Cont.)

- Features of the Data Pool Maintenance GUI (Cont.)
 - This lesson provides instruction in the full-capability version of the DPM GUI
 - However, the functions that are available to limited-capability operators as well as the functions that are not available to limited-capability operators are identified


DPM GUI: Home Page

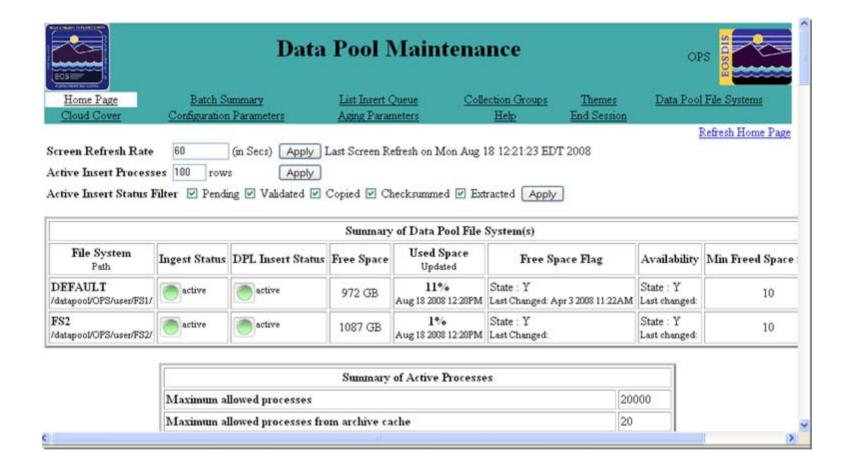


DPM GUI: File System Information Page

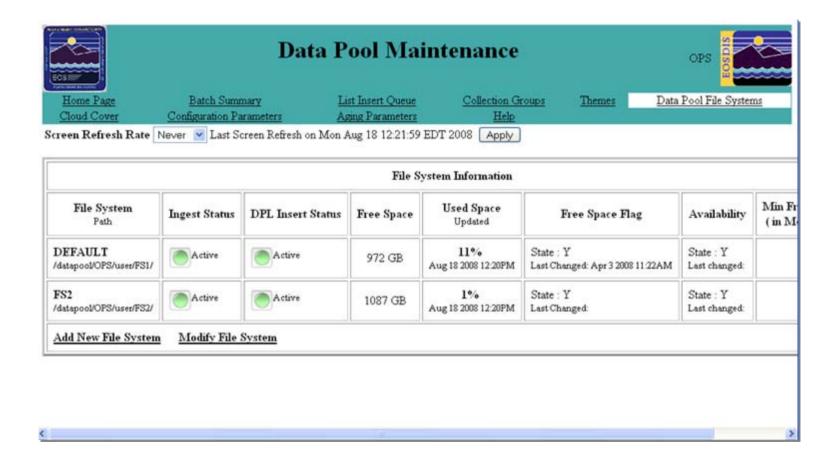


DPM GUI: Add New File System Page

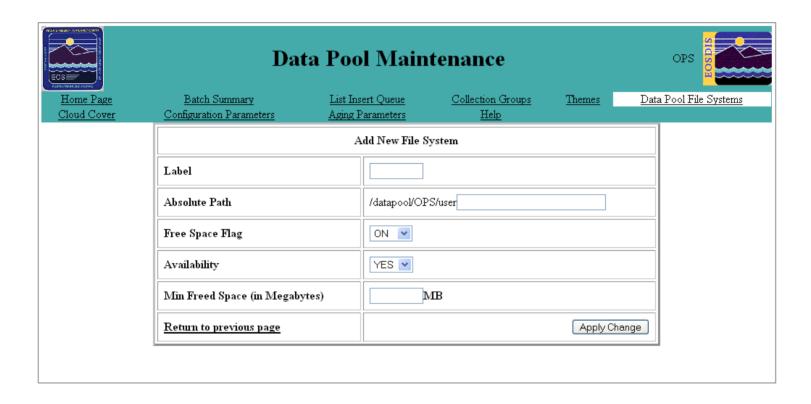


DPM GUI: Add New File System Information Page

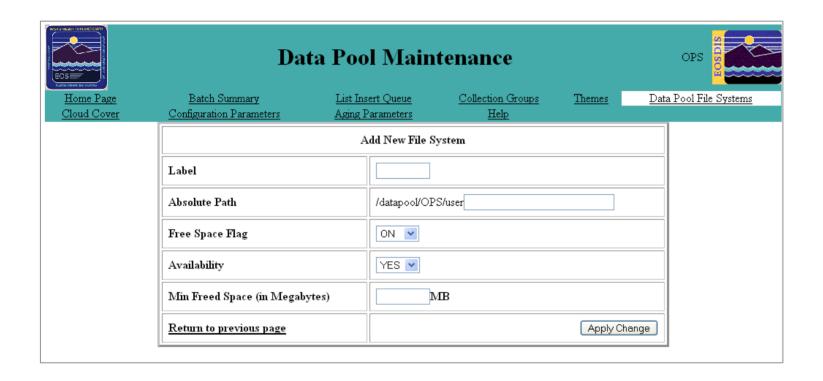


DPM GUI: Modify File System Information Page

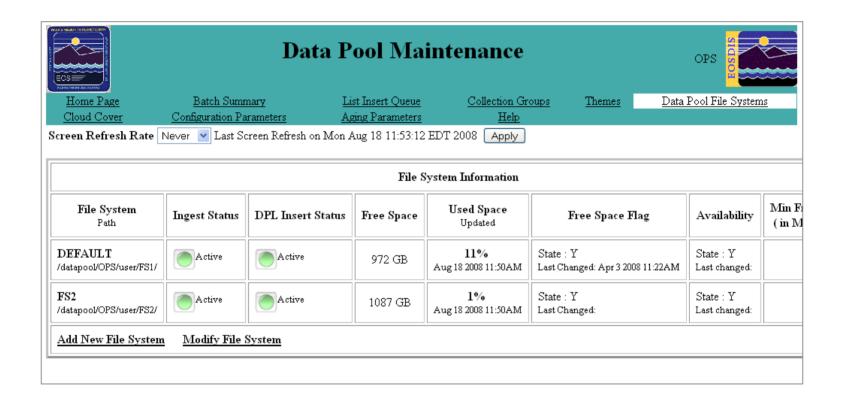


DPM GUI: Cloud Cover Information Page

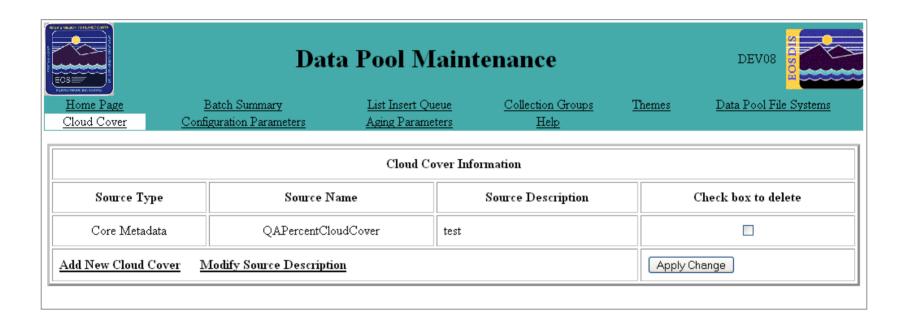


DPM GUI: Add New Cloud Cover Information Page

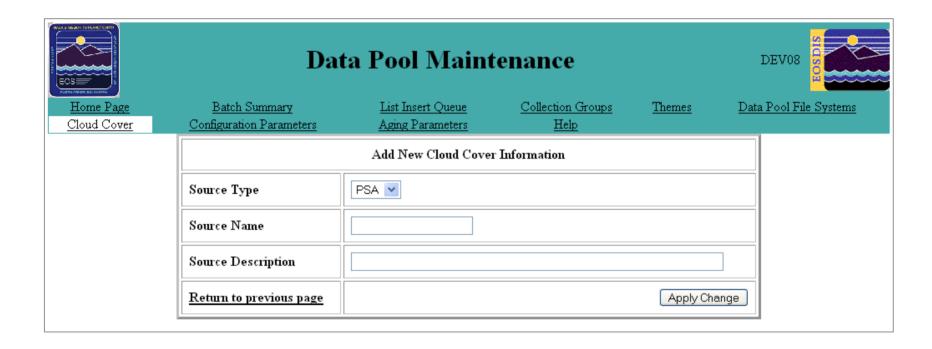


DPM GUI: Modify Cloud Cover Source Description Page

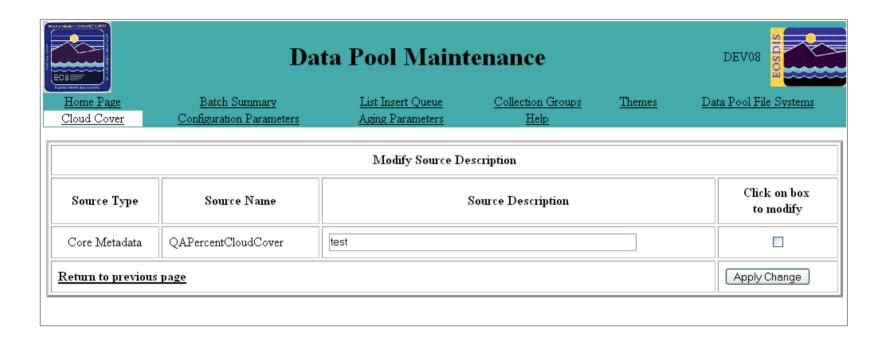


DPM GUI: Batch Summary Page

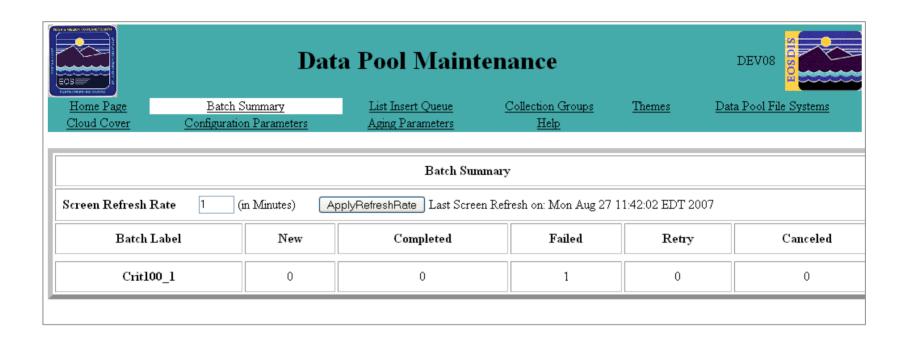


DPM GUI: List Insert Queue Page

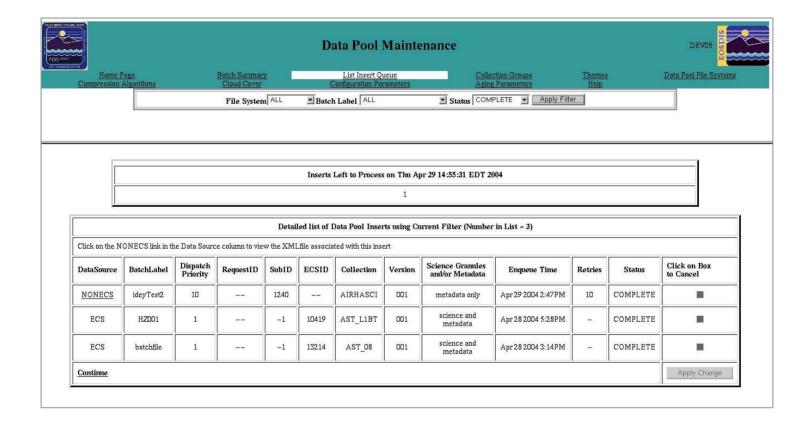


DPM GUI: List of Configuration Parameters Page

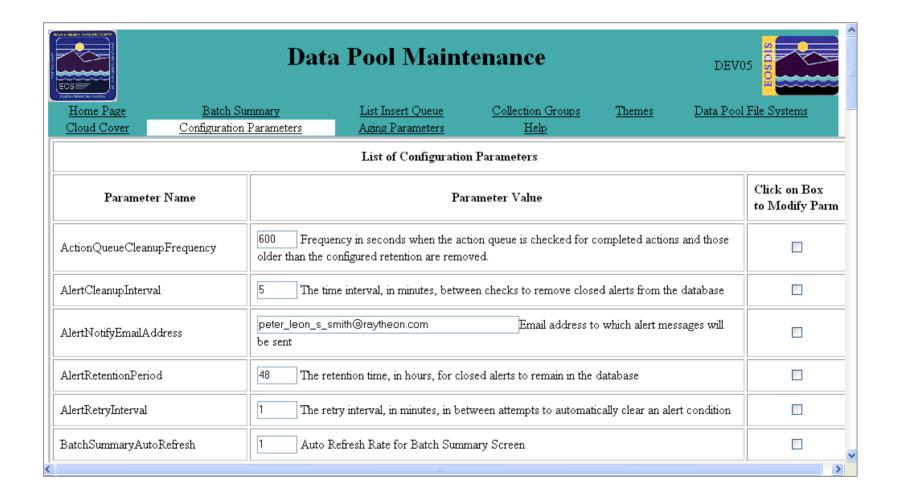


DPM GUI: Aging Parameters Page

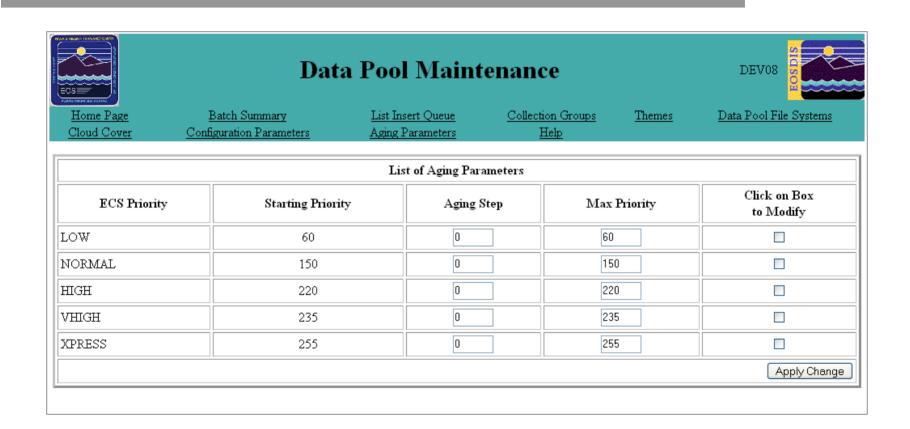


DPM GUI: Collection Groups Page

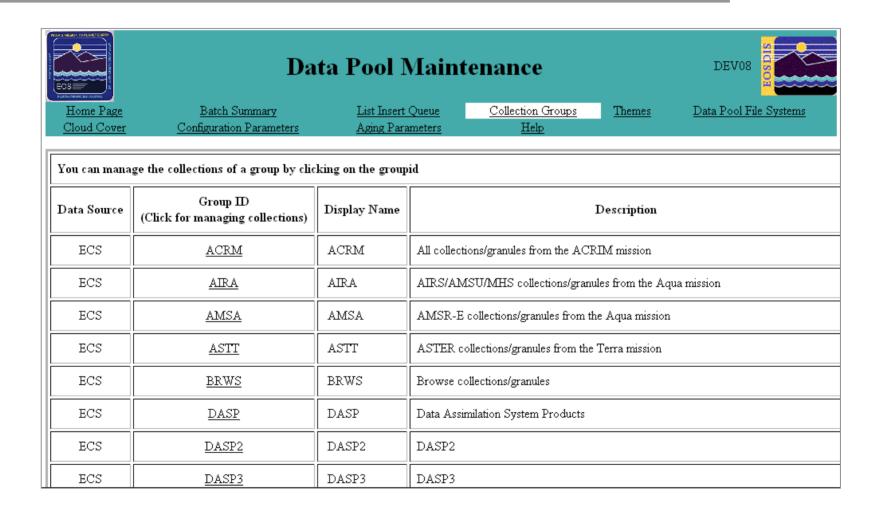


DPM GUI: List of Collection Page

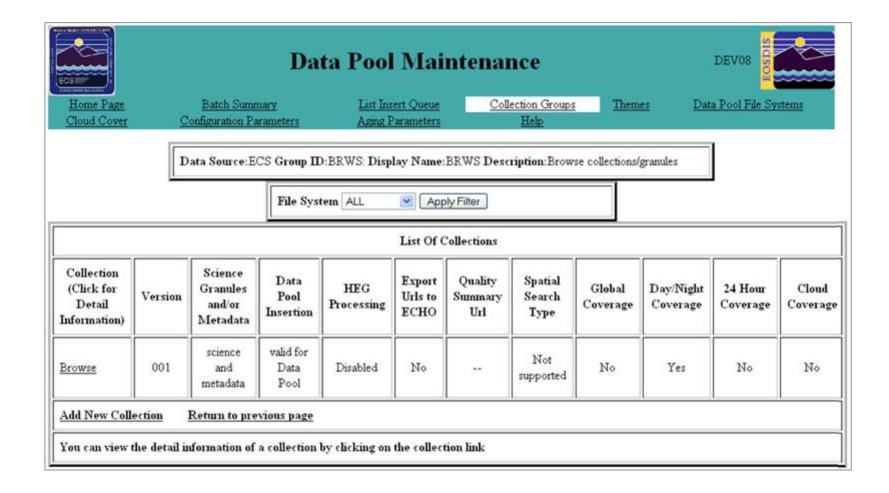


DPM GUI: ECS Collection Detail Information Page

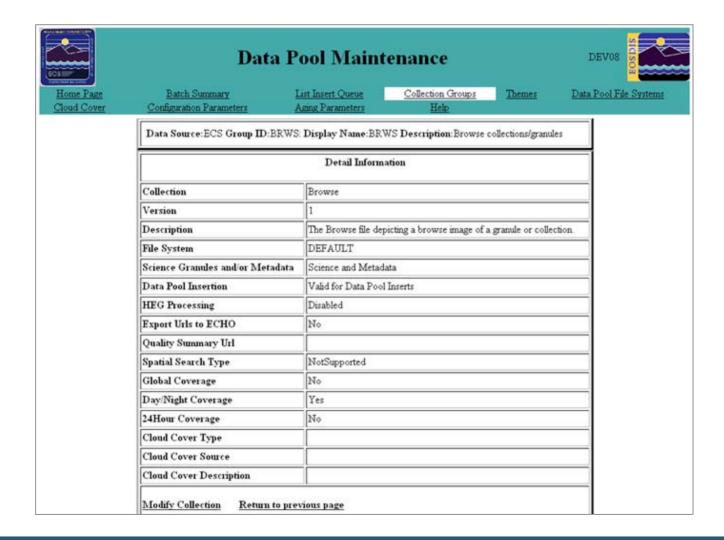


DPM GUI: Modify Collection Page

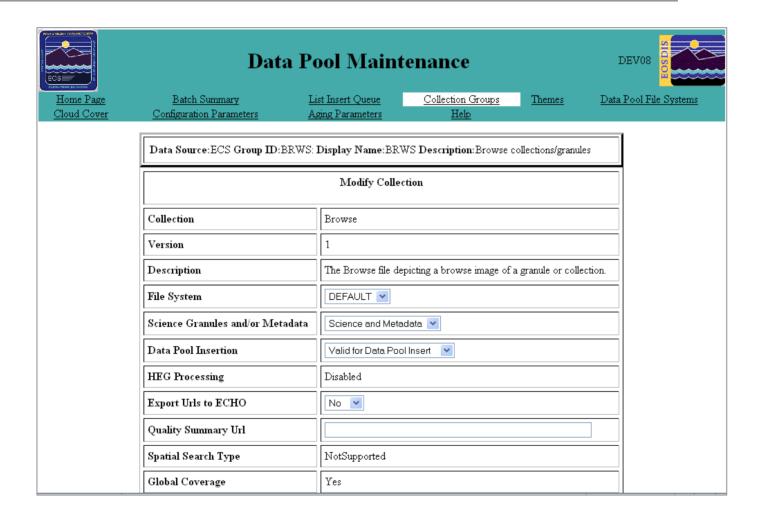

DPM GUI: Collections Not in Data Pool Page

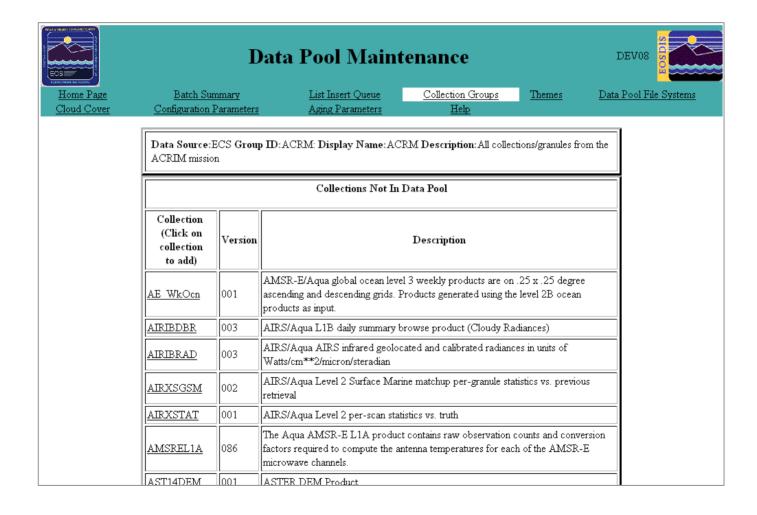


DPM GUI: Add New [ECS] Collection Page

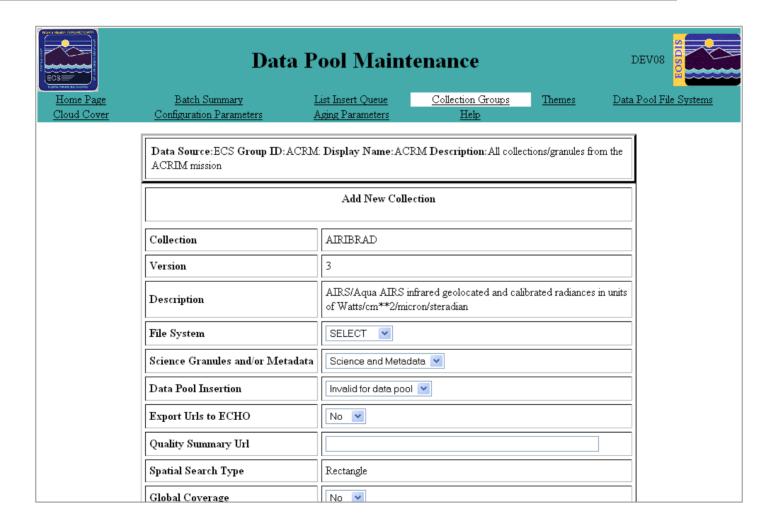


DPM GUI: Modify Collection Group Page

Data Pool Maintenance							
Home Page Compression Algorithms		Batch Summ Cloud Cove		a Pool File Systems			
Modify Collection Group							
Data Source	Group ID (Click to manage collection)	Display Name	Description	Check Box to Modify			
ECS	<u>ACRM</u>	ACRM	All collections/granules from the ACRIM mission	Г			
ECS	AIRA	AIRA	AIRS/AMSU/MHS collections/granules from the Aqua mission	Г			
ECS	<u>AL22</u>	AL22	Description	Г			
ECS	<u>AMSA</u>	AMSA	AMSR-E collections/granules from the Aqua mission	Г			
ECS	ASTT	ASTT	ASTER collections/granules from the Terra mission	Г			
ECS	BRWS	BRWS	Browse collections/granules	Г			
ECS	DASP	DASP	Data Assimilation System Products	Г			
ECS	<u>othr</u>	OTHR1	Other Products. This group is used for ancillary products or other non-science products	Г			
ECS	SAG3	SAG3	All collections/granules from the SAGE III mission	Г			
ECS	SECDEMO	SECDEMO	group for security demo going well	Г			
NON-ECS	TEST	TEST1	This NON ECS group is to be used by the WEB ACCESS folks - don't delete any granules from it	Г			
ECS	TESTONE	TESTONE	this is a test	Г			
ECS	TEST_ADD	123456789012	testing for adding collection to this group	Г			
NON-ECS	UNITTESTSEC	UNIT	Unit test demo for security ticket	Г			
Return to previo	Return to previous page						
N. I.		NOTE: E	By changing the display name, previously established links may not be functional anymore				


DPM GUI: Detailed List of Data Pool Themes Page

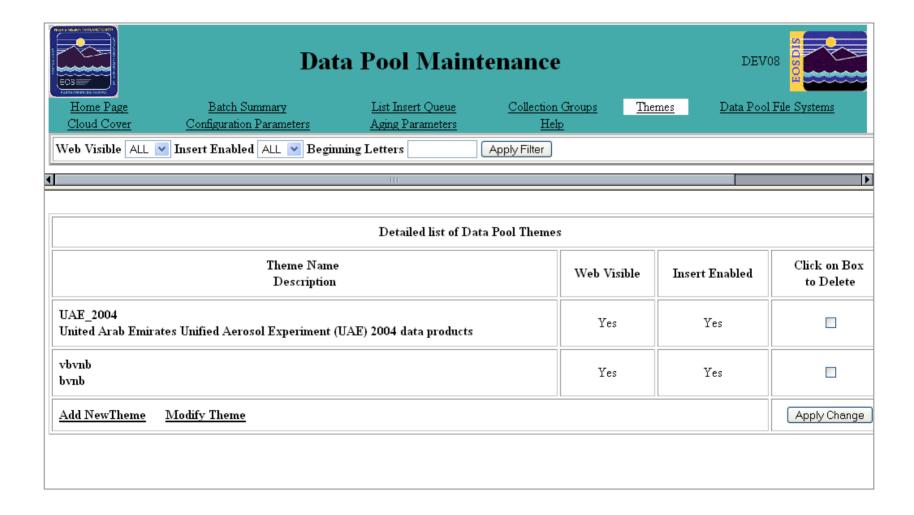


DPM GUI: Add New Theme Page

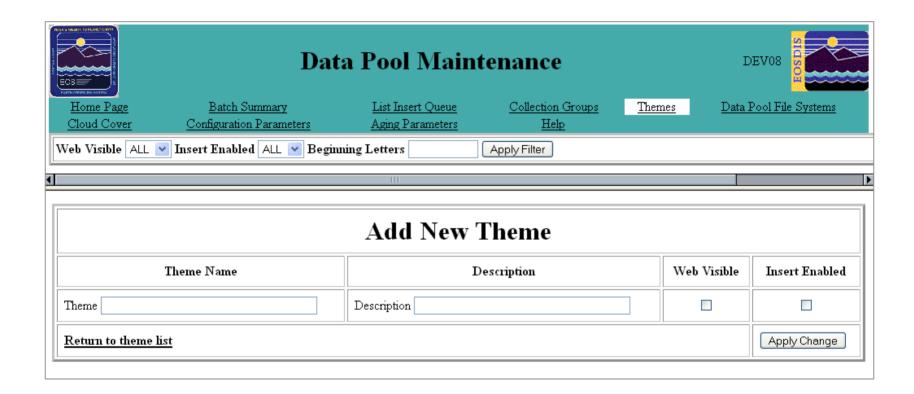

DPM GUI: Modify Theme Page

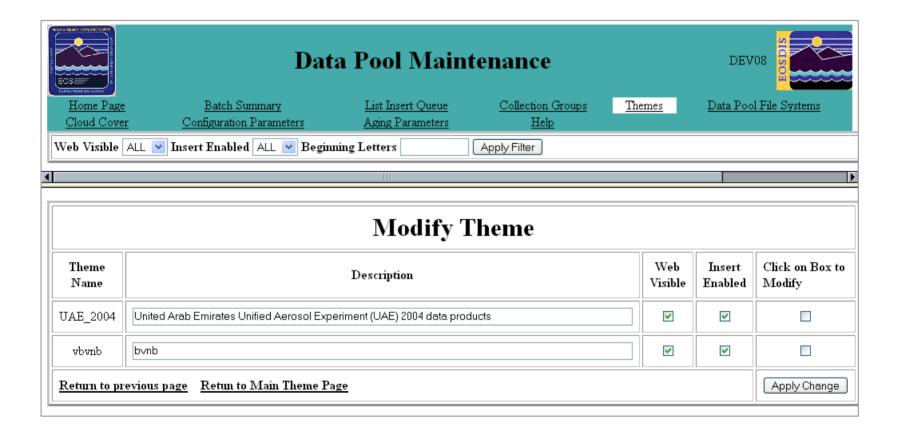

DPM GUI: Help Page

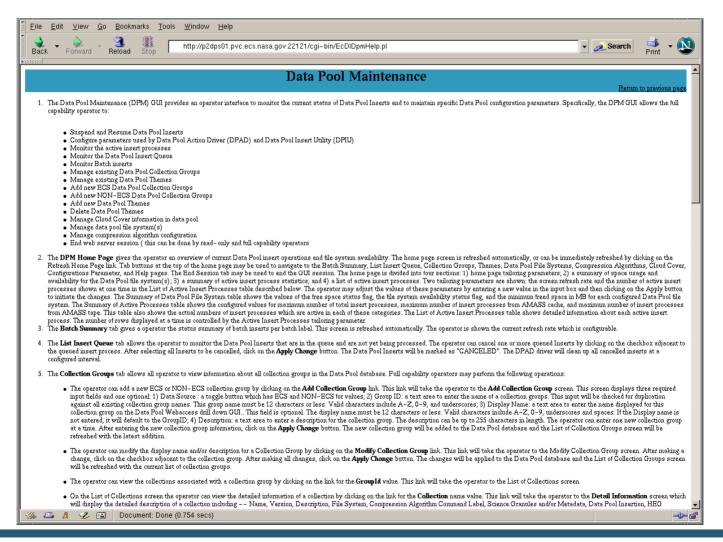

Number of Drivers to Run

- Recommended initial configuration
 - 3 event drivers
 - 3 action drivers
 - 1 recovery driver
 - 1 deletion driver
- EcNbDriverStart < MODE > de da dr dd
- Increase throughput by doubling number of event and action drivers (i.e., 6 each)
- isql query to identify a condition in which action processing lags behind event processing
 - select max(actionDateTime from EcNbActionQueueLog where actionStatus = 'Acquire' or actionStatus = 'ActionNotification'
 - if delay is an hour, try increasing number of action drivers to one and one-half times the number of event drivers (e.g., 6 event drivers and 9 action drivers)

DPM GUI User Messages

Message Text	Impact	Cause and Corrective Action
DB Error: You entered a duplicate collection group name that exists in the database. Please try again	Unable to add a new group id	Duplicate group name is entered. Check the list of group ids and enter a group name consisting of four letters, which is not on the list.
INPUT Error: You entered an invalid group name. Please see help page for more information. Please see section Add Collection Group	Unable to add a new group	Lower case letter is entered. Group id should be all Upper case letters.
INPUT Error: You entered an invalid name. Please see log for more details.	Unable to add a new non- ECS collection	Special characters/small letters are entered.
INPUT Error: You entered an invalid theme name. Please see help page for more information. Please see section: Add New Theme	Unable to add a new theme	Special characters/small letters are entered. Theme names should be in capital letters and without any special characters.
DB Error: Theme can not be null or empty	Unable to add a theme	A null or empty string is entered. Theme name should contain capital, small letters. Space is also allowed but no special characters.

DPM GUI User Messages (Cont.)

Message Text	Impact	Cause and Corrective Action
DB Error: You entered either an existing theme name or a collection or a group name or an ESDT name. Check the log at /usr/ecs/ <mode>/CUSTOM /log/EcDIDpmDataPoolGui. log for more details</mode>	Unable to add a theme	A name is entered, which is a duplicate name for a group, collection or an ESDT name.
DB Error: This collection is allowed for insertion therefore Spatial Search	Unable to modify Spatial Search type for a collection	Collection is not allowed for insertion.
Type cannot be modified for this collection		First make the collection allowed for insertion and then try to modify search type
DB Error: Error adding this collection. Collection entry	Unable to add a collection.	Duplicate collection name entered.
<collection name=""> <version> already exist</version></collection>		Verify the list of collection and then enter a name, which is unique.
DB Error: Internal error occurred	A db transaction interrupted.	Database connection is lost for network error.
		No suggestion.
DB Error: delete failed because there are granules associated with	Unable to delete a theme.	There are granules associated with this theme.
this theme		Disassociate granules from this theme and then delete it.

Data Pool Scripts

- Update Granule Utility
 - Updates granule retention period
 - Updates retention priority (optional)
- Data Pool Cleanup Utility
 - A dummy version of EcDICleanupDataPool.pl is delivered in 7.22 which tells operator to run the CleanupGranules or CleanupFilesOnDisk Utilities instead.
- Data Pool Online Archive Cleanup Utility
 - Provides a mechanism by which the ECS Operations Staff can remove granules and their associated metadata and browse files from the Data Pool disks and the corresponding Data Pool database inventory.

- Data Pool Cleanup Orphan/Phantom Validation
 - Provides a mechanism for the ECS Operator to perform Data Pool orphan/phantom validation, and to remove the orphaned data from the Data Pool Database inventory and the Data Pool disks if desired.
- Data Pool SoftLink Check Utility
 - Used to find or delete 'broken' symbolic links, i.e., links that point to files that do not exist.
- Data Pool Publish Utility
 - Publishes specified granules from a file, command line or collection. It is primarily designed to publish granules that already exist in the Data Pool, but it can also be used to insert granules into the Data Pool from AIM.

- Data Pool Unpublish Utility
 - Unpublishes specified granules and remove associated browse granule if permitted from the Data Pool.
 - Unpublish granules which are marked for deletion in the AIM database (deleteEffectiveDate is set, or DFA flag is set to "Y" or "H"), for example, as would occur after a run of the Granule Deletion Utility.
- Data Pool Inventory Validation Utility
 - Provides the EMD Operations Staff with a command-line interface to identify the discrepancies between AIM and DPL databases.

- Data Pool Checksum Verification Utility
 - Provides a mechanism by which the ECS Operations Staff can perform checksum verification for files in the Data Pool.
- Restore Online Archive from Tape Utility
 - Repairs individual granules or files that are lost or damaged in the on-line archive provided that the inventory entries of the corresponding granules are completely intact.
- Restore Tape from Online Archive Utility
 - Repairs individual files that are lost or corrupted on tape based on the primary file instance that is present in the on-line archive.

- Data Pool Access Statistics Accumulation Utility
 - Derives statistics from event logs produced by the Data Pool FTP server and the Data Pool Web Access application.
 - Statistics are written to a data base that can be used to produce tabular reports for loading/manipulation by a spreadsheet application program.
- Data Pool Archive Access Statistics Data Utility
 - Archives the granule access data from the Data Pool database into a tab-delimited ASCII file.
- Batch Insert Utility
 - Inserts ECS data that are already in the archive into the Data Pool.

- Most Recent Data Pool Inserts Utility
 - Lists the most recent additions to the Data Pool
- Data Pool Collection-to-Group Remapping Utility
 - Reassigns a Data Pool collection to a collection group other than the one to which it was originally assigned
- Data Pool Move Collections Utility
 - Moves collections from one file system to another
- Data Pool Hidden Scrambler Utility
 - Makes the transition to or renames (with encrypted names)
 hidden directories for order-only granules in the Data Pool

- Data Pool Band Backfill Utility
 - Command line tool that can correct band extraction problems that occurred during DPL registrations. Granule registrations cannot fail if band extraction problems are encountered but the subsequent publications on convert-enabled data types must fail if the band information is not present in the DPL database at publication time.
- Data Pool Remove Collection Utility
 - Provides a mechanism by which ECS Operations staff can remove collections from the Data Pool database that are no longer of interest to the end users.

Update Granule Utility

- The Update Granule Utility (EcDIUpdateGranule.pl) extends retention of data already in Data Pool
- Options
 - noprompt: Suppress prompts and detailed information
 - -theme: Specifies a valid theme name (i.e., a character string that matches an existing theme name in the Data Pool inventory)
- Run for a single granule with command-line input
 - grnid input parameter specifies granule information
- Run for multiple granules listed in input file
 - file input parameter specifies the file use to provide granule data to the utility

Update Granule Utility (Cont.)

- Run as background process, suppressing all warnings, error messages, prompts
- Connects to data base and uses Sybase stored procedures

Data Pool Cleanup Utility

 The following usage statement has been added to the EcDICleanupDataPool.pl script after 7.22 delivery. The EcDICleanupDataPool.pl script has not been removed from the baseline, but the recommendation is to use two new scripts (EcDICleanupFilesOnDisk.pl and EcDICleanupGranule.pl) instead.

```
print << "USAGE_HERE";</pre>
```

EcDICleanupDataPool.pl has been replaced with two new utilities.

- 1) EcDlCleanupGranules.pl for removal of granules from the datapool
- 2) EcDlCleanupFilesOnDisk.pl for validation of datapool inventory

Please run the respective scripts without parameters for usage information.

USAGE_HERE

Data Pool Cleanup Granules Utility

- The CleanupGranules Utility (EcDlCleanupGranule.pl) replaces EcDlCleanupDataPool "cleanup only"
- Removes files and database entries for specified granules from the Data Pool
- Propagates AIM Granule Deletions to Data Pool
- Removes expired nonECS granules from the Data Pool
- To specify new granules to be cleanup, one of the following five parameters can be used:
 - -file <filename>
 - -geoidfile <filename>
 - -grans "<gran1><gran2><gran3>..."
 - -ecsgrandel
 - -expired

Data Pool Cleanup Orphan/Phantom Validation Utility

- The CleanupFilesOnDisk Utility (EcDICleanupFilesOnDisk.pl) replaces EcDICleanupDataPool "validation" functionality
- Identifies orphans (on disk, not in database) and phantoms (in database, not on disk) in Data Pool (public and hidden)
 - Science phantoms
 - Browse phantoms
 - Browse files with no cross reference to science granules
 - Science orphans
 - Browse orphans
- Always does both orphan and phantom checking (no orphan or –phantom option)

Data Pool Cleanup Orphan/Phantom Validation Utility (Cont.)

- Deletes orphan files if –fix option is used
- Does not repair phantoms
 - Phantom repair is via RestoreOlaFromTape in 7.22
 - Phantom cleanup is via EcDICleanupDataPool –file in 7.21
- If –fix option is used, also
 - Removes files in temporary directories older than MAX_ORPHAN_AGE
 - Removes "DpRecentInserts" files older than 7 days

Data Pool SoftLink Check Utility

- The EcDlLinkCheck.ksh script finds 'broken' links in the Data Pool directories, i.e., links whose targets do not exist
 - Public Data Pool: Browse links (from science directory to browse directory)
 - Hidden Data Pool: links to granules in public Data Pool for order purposes
 - Pulldir: links to granules in public Data Pool for order purposes

Removes the broken links, if –fix option is used

Data Pool Inventory Validation Utility

- The Online Archive Validation Tool (EcDlInventoryValidationTool.pl) provides the EMD Operations Staff with a command-line interface to identify the discrepancies between AIM and DPL databases
- -mode is a required parameter to specify the mode of operation. The MODE parameter is mandatory as the first parameter
- -outputDir is a optional parameter to specify the relative path under base directory /usr/ecs/<MODE>/CUSTOM/data/DPL/Validation.

Data Pool Inventory Validation Utility (Cont.)

- -suppressLDeleted is a optional parameter when identifying granules that are missing in the DPL database, don't include the ones that have been logically deleted (deleteEffectiveDate is not null) in the AIM database.
- -suppressDFAed is a optional parameter when identifying granules that are missing in the DPL database, don't include the ones that have been DFAed (DeleteFromArchive = "Y") in the AIM database.
- EcDlInventoryValidationTool.pl <command line parameters>

Data Pool Checksum Verification Utility (DPCV)

- The DataPool Checksum Verification Utility (EcDIDpcvStart)
 provides a mechanism by which the ECS Operations Staff
 can perform checksum verification for files in the Data Pool.
 It can be scheduled and run as a background process to
 proactively verify the integrity of files in the Data Pool.
- The utility is capable of performing checksum verification by sampling files based on ESDT and insert date range, or elapsed time since the last time checksum was verified, or a given granule list.
- According to the sampling options specified, the utility scans the appropriate files and verify their checksum values.
- Upon successful checksum verification, the utility will update the time when checksum was verified for each file in the DataPool database.

Data Pool Access Statistics Utility

- Processes logs of web access and FTP access and stores results in tables in the Data Pool database
- Two versions, each with configuration file
 - EcDIRollupWebLogs.pl (EcDIRollupWebLogs.CFG) processes web access logs
 - EcDIRollupFtpLogs.pl (EcDIRollupFtpLogs.CFG)
 processes SYSLOG for FTP entries
- Captured data are written to a flat file and exported to Sybase
- Associated shell scripts
 - DIDbArchiveAccessStat
 - DIDbDeleteAccessStat
 - DIDbRestoreAccessStat

Data Pool Batch Insert Utility

- Command-line utility allows insert of granules from the ECS archive or from outside ECS
 - Queues granules for Data Pool Action Dispatcher (DPAD) and insert by Data Pool Insert Utility (DPIU)
 - Batch label specified by -label option
 - Theme association specified by -theme option
 - Note: If -theme option is used to link granules resident in Data Pool to a theme, and the granules were originally inserted using the Batch Insert Utility, must use a different batch label from that used for original insert into Data Pool

Data Pool Hidden Scrambler Utility

- Running the Data Pool Hidden Scrambler Utility in Rename Mode
 - The Data Pool Hidden Scrambler Utility (EcDIHiddenScrambler.pl) can be run in either of the following two modes:
 - Transition
 - Rename
 - In transition mode the utility generates hidden directory names and corresponding database entries for every collection defined for Data Pool in the affected operating mode
 - The transition mode can be used while Data Pool is up
 - The utility should be run in transition mode only once; i.e., the first time the utility is run in any given operating mode
 - Because transition mode is not used during normal operation, it is not described in any detail in this lesson

Data Pool Hidden Scrambler Utility (Cont.)

- Running the Data Pool Hidden Scrambler Utility in Rename Mode (Cont.)
 - In rename mode the utility renames all of the scrambled names to a new scrambled name
 - This involves updates to the directory in the file system and to the database
 - Links from the FtpPull area (and elsewhere) are preserved
 - Renaming is done during DAAC downtime only
 - If the Data Pool Hidden Scrambler Utility is interrupted during execution, upon restart it detects failures from the previous run and continues processing whatever was left unprocessed
 - The operator is given no choice as to recovery
 - Either recovery proceeds or the Data Pool inventory and disk files are in a corrupted state

Data Pool Hidden Scrambler Utility (Cont.)

 Running the Data Pool Hidden Scrambler Utility in Rename Mode (Cont.)

WARNING

The Data Pool Hidden Scrambler Utility should be run in transition mode only once; i.e., the first time the utility is run in any given operating mode. In normal operations, the Data Pool Hidden Scrambler Utility is run in rename mode.

Most Recent Data Pool Inserts Utility

- The Most Recent Data Pool Insert Utility (EcDIMostRecentInsert)
 lists the most recent additions to the Data Pool. The output of the
 utility is a set of files that a user could download and quickly
 inspect to identify recent additions to the Data Pool.
- The utility takes in a date command-line parameter indicating the day of interest to the user.
- The Most Recent Data Pool Insert Utility normally runs as a cron job. However, if it is necessary to run the utility from the command line it is possible to do so.
- The procedure for running the Most Recent Data Pool Insert Utility is based on the following assumptions:
- Data Pool database server is running.
- Data Pool database is available.
- Stored procedures are present.

Data Pool Collection-to-Group Remapping Utility

- The Data Pool Collection-to-Group Remapping Utility (EcDIRemap.pl) is a command-line utility interface that is used for reassigning a Data Pool collection to a collection group other than the one to which it was originally assigned.
- The procedure for running the Data Pool Collection-to-Group Remapping Utility is based on the following assumptions:
- "Insert Enabled Flag" for the source collection has been turned off using the Data Pool Maintenance GUI
- The group to which the user is mapping the collection already exists in the Data Pool database.
- The group to which the user is mapping the collection is not the BRWS (browse) group.

Data Pool Collection-to-Group Remapping Utility (Cont.)

- The collection to be remapped is not the Browse (Browse.001) collection.
- Data Pool database server is running.
- Data Pool database is available.
- Stored procedures are present.
- There are several assumptions expected of the Data Pool Collection-to-Group Remapping Utility. The utility expects the exists of the collection in the Data Pool to which the user is mapping; it assumes that the browse collection is always located in the group "BRWS"; it also assumes the stored procedures are present. The Group Mapping utility runs only if the Data Pool database server is running and if the database is available.

Data Pool Move Collections Utility

- The Move Collections Utility (EcDIMoveCollection.pl)
 provides the EMD Operations Staff with a command-line
 interface to move collections from one file system to
 another.
- The utility relies on the fact that symbolic links will be set from the collection's old filesystem to its new filesystem.

For example, before a move, a collection might be located here: /datapool/OPS/user/FS1/MOAT/AIRABRAD.007. After invoking the utility with a target filesystem of FS2, it will be moved to /datapool/OPS/user/FS2/MOAT/AIRABRAD.007 with a symbolic link from its old location, i.e. /datapool/OPS/user/FS1/MOAT/AIRABRAD.007 →/datapool/OPS/user/FS2/MOAT/AIRABRAD.007

Data Pool Band Backfill Utility

- The DPL Backfill Utility (EcDIBandBackfillUtilityStart) is a command line tool that can correct band extraction problems that occurred during DPL registrations. Granule registrations cannot fail if band extraction problems are encountered but the subsequent publications on convert-enabled data types must fail if the band information is not present in the DPL database at publication time.
- The Band Backfill utility was developed to correct the problems above. It will:
- backfill the band information in the DPL database for the registered granules specified in its input file.
- request the publication of the backfilled granules via the new Data Pool Action driver.
- The DAAC Operations staff can identify the granules that need band backfill via the Data Pool Maintenance GUI or by inspecting the EcDINewInsertUtilitiyDPAD.log file. In both cases, the type of error encountered is:
- ERROR publing operation encountered a convertEnabled granule with no band information, granuleState

Data Pool Remove Collection Utility

- The Data Pool Remove Collection utility provides a mechanism by which ECS Operations staff can remove collections from the Data Pool database that are no longer of interest to the end users.
- -debug parameter helps developers debug the app by printing copious debug information
- ShortName parameter is the short name of the collection to be deleted
- -VersionId parameter is the version Id of the collection being deleted
- -inpfile parameter is the full path to an input file specifying multiple collections. Please note that either an input file or a ShortName/VersionId combination should be used but not both
- EcDIRemoveCollection.pl <MODE> -ShortName <SHORTNAME> -VersionId <VERSIONID> [-debug]

OR

EcDIRemoveCollection.pl <MODE> -inpfile <INPUTFILENAME> [debug]

Archive Checksum Verification Utility (ACVU)

- The Archive Checksum Validation utility (EcDsAmAcvu.pl) provides a mechanism by which the ECS Operations Staff can perform checksum verification of files in the AIM archive.
- According to the sampling criteria specified, the utility will identify the files to be verified, organize the result by location on tape, verify their checksum values, and update the last checksum verification time and status in the AIM Inventory database. The utility will need to verify that an LTO tape is in the near-line archive (i.e. not off-line) and alert the operator if the tape is off-line.

Archive Checksum Verification Utility (Cont.)

- Upon detection of checksum verification failure after a configurable number of retry attempts (NUM_RETRIES in configuration file), the utility will log detailed information about the failure.
- The log will also include statistical summary information including total number of files checked, number of files that failed checksum, percentage of files that failed checksum, categorized by ESDT.

XML Check Utility (Xcu)

- The XML Check utility (EcDsAmXcu.pl) provides a mechanism by which the ECS Operations Staff can periodically check for corruption in the XML Archive.
- In order to detect corruption, the utility verifies the contents of the files are well formed using xmllint.
- There are eight command line parameters that may be used:
- -days is a optional parameter to specify days since last checked.
- -percent is a optional parameter to specify percentage of files to check.
- -ESDT is required if granuleid or file parameters are not present. This parameter is used to specify which ESDTs to check. This is a comma separated list (no spaces). Can also specify "ALL" to include all ESDTs.

XML Check Utility (Cont.)

- -startdate is a optional parameter used with –ESDT option.
 Specifies starting insert date to use for ESDTs.
- -enddate is a optional parameter used with –ESDT option.
 Specifies ending insert date to use for ESDTs.
- -granuleid is required if ESDT or file parameters are not present. This parameter is used to specify which granules to check. This is a comma separated list (no spaces).
- -file is required if ESDT or granuleid parameters are not present. This parameter is used to specify which granules to check. Granule ids should be listed in a file separated by newlines.
- -outputDir is a optional parameter to specify directory for error files under /workingdata/emd/<MODE>/Xcu.

Data Pool Non-ECS Action Driver Insert Tool

- Running the Data Pool Non-ECS Action Driver Insert Tool
 - The Non-ECS Action Driver (EcDINdActionDriver) tool provides the DAAC Operations Staff with a command-line interface for inserting Non ECS granules into the Data Pool
 - The command is found in the /usr/ecs/OPS/CUSTOM/bin/DPL directory.
 - This tool runs only if the Data Pool database server is running and if the database is available.

Data Pool Non-ECS Action Driver Insert Tool (Cont.)

- Running the Data Pool Non-ECS Action Driver Insert Tool (Cont.)
 - Log in at the host where the Non-ECS Action Driver is installed
 - Type cd /usr/ecs/<MODE>/CUSTOM/bin/DPL and then press the Return/Enter key
 - Type EcDINdActionDriver < MODE > [configFile < filename >] and then press the Return/Enter key
 - <MODE> is the mode in which the utility is being executed (e.g., OPS, TS1, or TS2)
 - <filename> is the name of a specific configuration file to be used as input to the utility. This field is optional. The default is /usr/ecs/<MODE>/CUSTOM/cfg/EcDINonECSActionDriverCFG
 - The Non-ECS ActionDriver tool queues Non-ECS data for insertion in the Data Pool. Insertions may be viewed using DPL Maintenance GUI List Insert Queue tab

Using the Spatial Subscription Server GUI

- The Spatial Subscription Server (NBSRV) GUI provides a convenient means of associating a Data Pool insert action with a subscription and designating a subscription for secure distribution
 - This can be done by User Services and/or science personnel, but the archive support personnel should also be familiar with the GUI and its use
 - Other tasks done with the Spatial Subscription Server GUI may also be of use to archive personnel
 - For example, viewing the acquire and notification actions currently being processed by the Spatial Subscription Server and viewing statistics on the processing of events and actions by the Spatial Subscription Server

Using the Spatial Subscription Server GUI (Cont.)

- The Spatial Subscription Server GUI permits an operator to perform the following kinds of activities:
 - View subscribable events
 - Review existing subscriptions in the Spatial Subscription Server (NBSRV) database
 - Add a subscription specifying Data Pool qualification and retention criteria, thus adding a subscription for Data Pool insert to the database
 - Create a standard subscription for notification and/or distribution of ECS data products
 - Designate a subscription for secure distribution

- The Spatial Subscription Server GUI permits an operator to perform the following kinds of activities (Cont.):
 - View the acquire and notification actions currently being processed by the Spatial Subscription Server
 - View statistics on the processing of events and actions by the Spatial Subscription Server


- New operator GUI security standards require the following two levels of permissions for the Spatial Subscription Server GUI:
 - Full Capability
 - Limited Capability
- An operator's level of permission is determined when the operator logs in to the GUI using the security login prompt

- Full-capability operators have the ability to configure parameters and perform all other actions that can be accomplished with the Spatial Subscription Server GUI
- Limited-capability operators are able to view a lot of information
 - However, on the limited-capability GUI some buttons and links have been disabled so it is not possible to perform certain actions or access certain pages

- This lesson provides instruction in the full-capability version of the Spatial Subscription Server GUI. In general, both full-capability operators and limited-capability operators can view the following items:
 - Subscribable events
 - Subscriptions
 - Bundling orders
 - Action queue
 - Statistics relating to Spatial Subscription Server performance

- Full-capability operators only may perform the actions:
 - Add, update, or delete (cancel) a subscription
 - Configure defaults for a bundling order
 - Add, update, or cancel a bundling order
- The Spatial Subscription Server GUI is a web application certified for use with Mozilla Firefox

Security Login Prompt

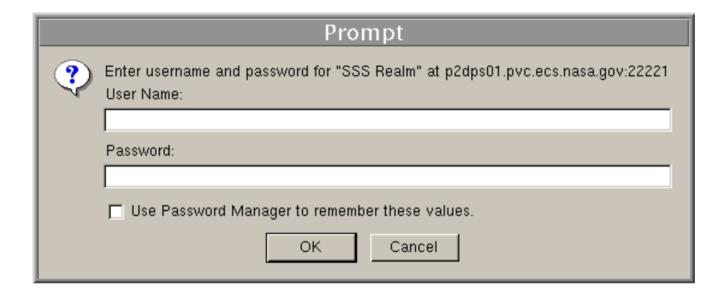

- The Spatial Subscription Server GUI Home Page provides four links for access to pages supporting various tasks:
 - List Events: access to pages for listing subscribable events
 - Manage Subscriptions: access to pages for managing subscriptions
 - Manage Bundling Orders: access to pages for managing bundling orders
 - Monitor Queues: access to pages for monitoring the action queue and listing statistics
- There is also a Help link providing descriptions of the Spatial Subscription Server functions to provide the operator with assistance in navigating through the GUI

Spatial Subscription Server GUI **Home Page**



Spatial Subscription Server

OPS



List Events

Manage Subscriptions

Manage Bundling Orders


Monitor Oueues

Help

Welcome to the Spatial Subscription Server GUI, a web-based interactive utility for:

- Listing subscribable events
- Managing subscriptions (list, view, cancel, update, add, suspend, resume)
- · Managing bundling orders
- Monitoring runtime queues and production statistics

Spatial Subscription Server GUI List Events Page

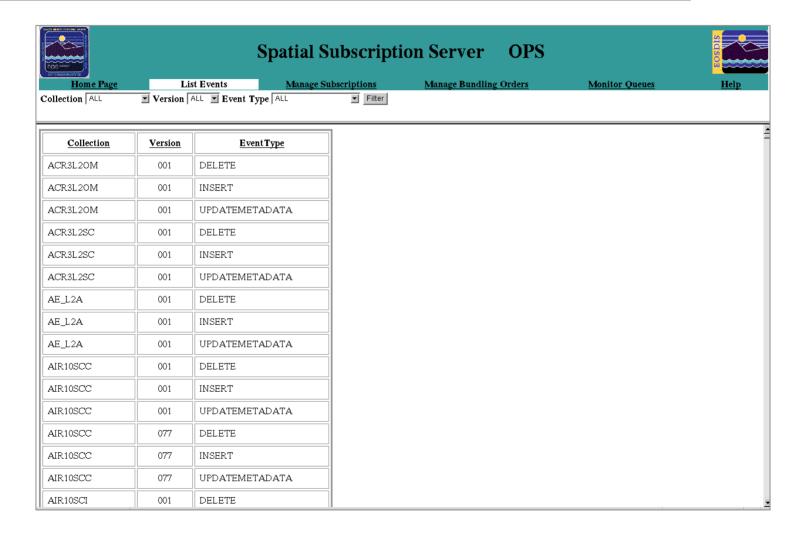


Spatial Subscription Server GUI Manage Subscriptions Page




Subscription Id	<u>User</u>	Collection	Version	Event Type	Status	<u>DataPool</u>	Start Date	Expiration Date	Time Last Updated
11	NOAA/SOAP	GDAS_0ZF	001	INSERT	Inactive	No	Jan 1 2000 12:00PM	Nov 7 2004 12:00PM	Feb 16 2004 4:28PM
12	NOAA/SOAP	OZONEEP	001	INSERT	Inactive	No	Jan 1 2000 12:00PM	Nov 8 2004 12:00PM	Feb 16 2004 4:29PM
14	NOAA/SOAP	SEA_ICE	001	INSERT	Inactive	No	Jan 1 2000 12:00PM	Nov 8 2004 12:00PM	Feb 16 2004 4:32PM
20	cmops	MOD04_L2	003	INSERT	Inactive	Yes	Jan 1 2000 12:00PM	Nov 9 2008 12:00PM	Feb 16 2004 4:43PM
52	userops	MOD13A1	001	INSERT	Inactive	No	Jan 1 2000 12:00PM	Nov 14 2004 12:00PM	Feb 16 2004 4:45PM
53	userops	MOD09A1	001	INSERT	Inactive	No	Jan 1 2000 12:00PM	Nov 14 2004 12:00PM	Feb 16 2004 4:46PM
54	userops	MOD43B1	001	INSERT	Inactive	No	Jan 1 2000 12:00PM	Nov 14 2004 12:00PM	Feb 16 2004 4:48PM
55	cmops	MOD11A1	001	INSERT	Inactive	Yes	Jan 1 2000 12:00PM	Dec 31 2004 12:00PM	Feb 16 2004 4:49PM
56	cmops	MOD11B1	001	INSERT	Inactive	Yes	Jan 1 2000 12:00PM	Dec 31 2004 12:00PM	Feb 16 2004 4:51PM
58	cmops	MOD13A1	001	INSERT	Inactive	Yes	Jan 1 2000 12:00PM	Dec 31 2004 12:00PM	Feb 16 2004 4:53PM

Spatial Subscription Server GUI Add Subscriptions Page

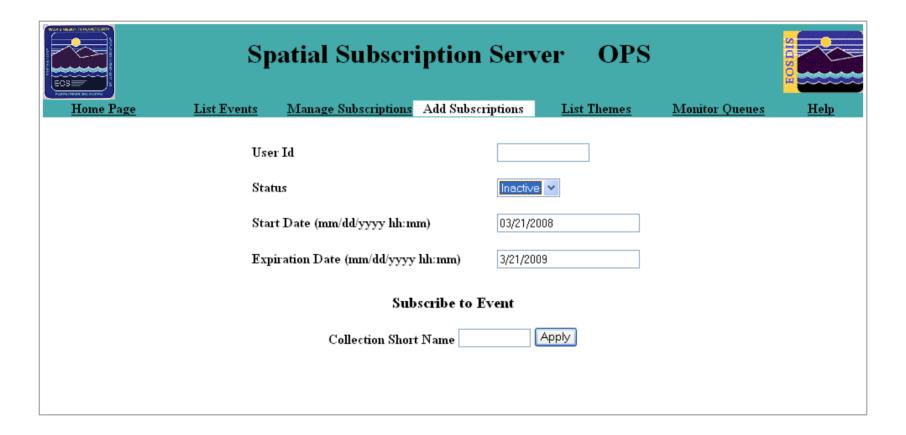

Spatial Subscription Server GUI View Subscriptions Page

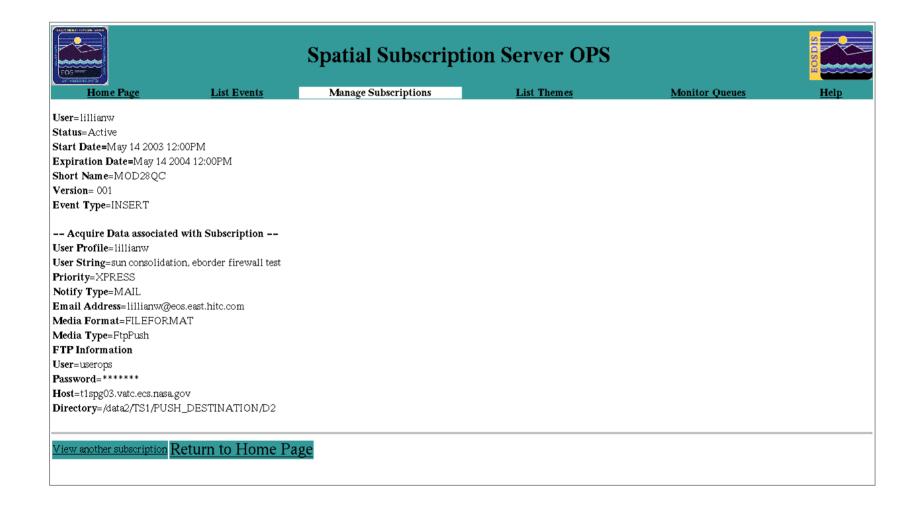


Spatial Subscription Server GUI Update Subscriptions Page

Spatial Subscrip	ption Server	OPS	
Name Page List Events Manage Subscriptures User M (1997)	Notes of S	Marile Owner	New York
Wart Dair (MNIDD:YYYY)			
Engitedion Date (MATRICAYY			
Subscr	Be to Event		Otherwise choose one or more actions (" Acquire: (" E-Mail Netification: (" Data Prof
Shirt Name / Version / Even	Турк: МООНСІКА НО І	MEET	Exter information below for the actions selected (not applicable for bundled subscriptions)
Sabscripti	ion Qualifiers		Acquire Information
			Corr Profile Pol.
12.7	iral Baris		Cur String
5000			
langer	Float / Date		Enal Abbres
Attetionte Name/Type	Min Value	Max Value	Media Format FILEFORMAT
F:: #	-		Media Type (FibFull M
н н			Principy (Vision 18)
1: #		-	Notify Type MAI.
T N	r r	-	Information for FigPosh and Secure Copy Bistribution (erg) Only)
#			Cher
	tring		Parent
			Extre puseword again for verification
Attribute Numer Type	Vider		Hot
	man di sanon		Blockey
			E-Add Neithration Information
	in facility		Artin Attens
	1.1.		Cher String
	petial		Métadata S
Exter coordinates	of increasing LLBOX		Data Prof Information
	Lettete		Science Granzien and iar Metadata S
7	Line of the last o		Check here to add theme. Exist first few chars of name.
West Longitude	East Longitud	•	
Seet	Latitude		System Subscription
100.000	aformation		
To bandle the subscription, check here and	choose from the list below	If Bunding Order	
	Order Scientism		
Limital	Nan Santas		
1	-		


Spatial Subscription Server GUI List Themes Request Page




Spatial Subscription Server GUI Theme List Page

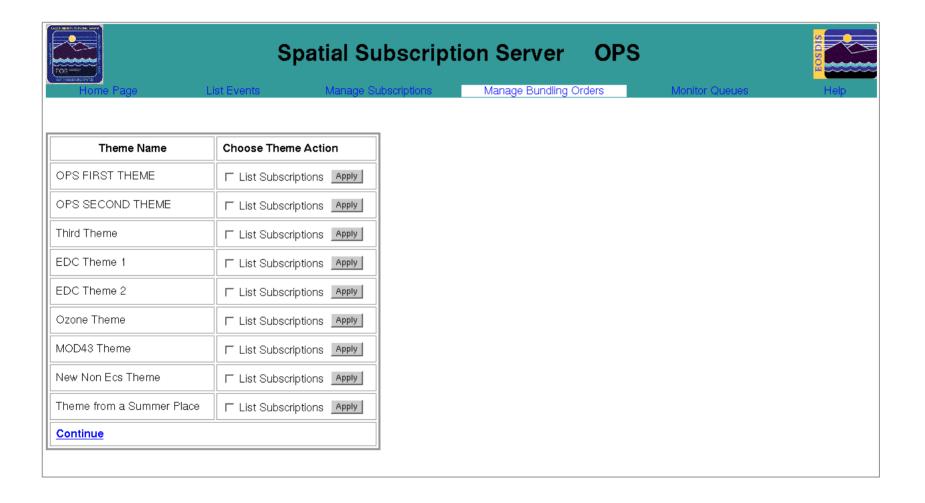

Spatial Subscription Server GUI List Subscriptions for Theme Page

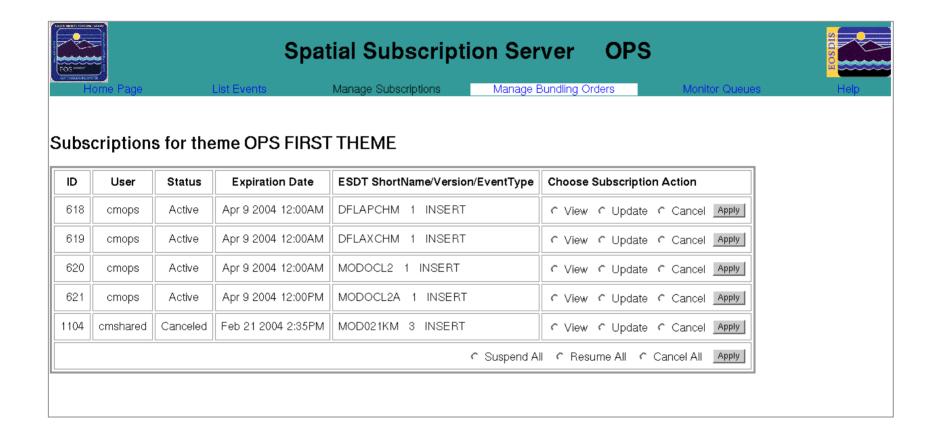

Spatial Subscription Server GUI Manage Bundling Orders Page

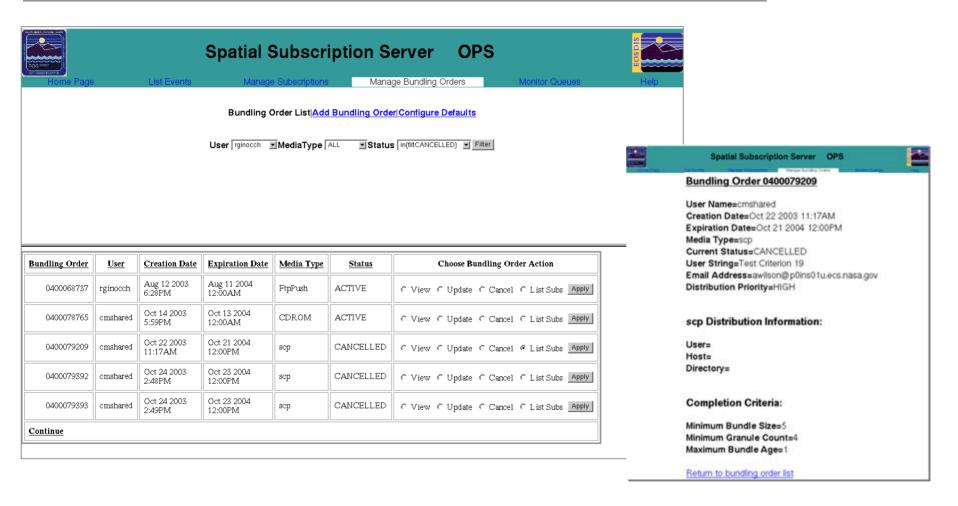


Spatial Subscription Server GUI Add Bundling Order Page



Spatial Subscription Server GUI Add Bundling Order: Data Pages


Hard Media

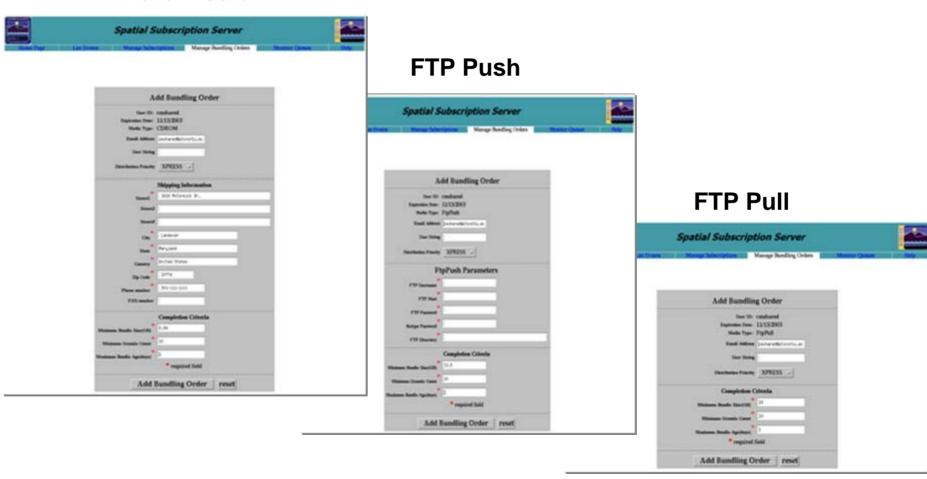

Spatial Subscription Server GUI Add Bundling Order: Data Pages


Spatia	al Subscripti	on Server	OPS	FOSDIS
List Events	Manage Subscriptions	Manage Bundling Orders	Monitor Ou	eues
	2000000	8 80 20	S	CF
	Add Bundl	ing Order		
Heer ID:	cmshared			
Expiration	10/21/2004			
Date: Media	TOTETTEOO			
Type:	scp			
Email Address	cmshared@p2ins02.pvc			
**		2		
	scp Para	meters		
Username			D	
Host		_		
		_		
Password Retype				
Password				
Directory	-			
120000000000000000000000000000000000000	Completion	Criteria		
Minimum Bundle	40			
Size(GB)) au			
Minimum				
100	10			
Count Maximum				
The same of the same	1			
Age(days)				
	* require	ed field		
	Add Bundling O	nder reset	Ē.	

Spatial Subscription Server GUI Update Bundling Order Page

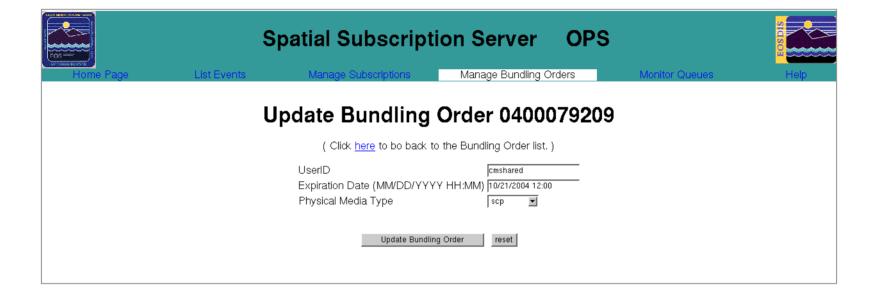


Spatial Subscription Server GUI Update Bundling Order: Data Pages


FTP Push

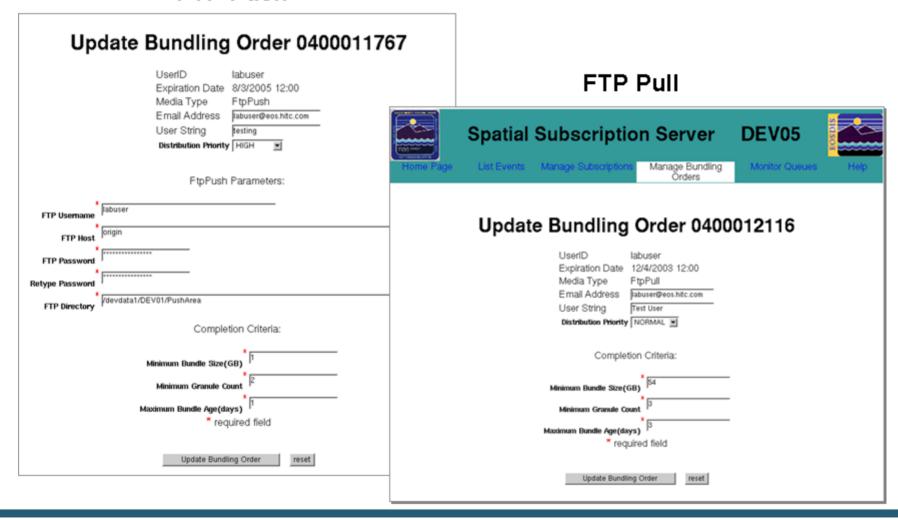


SSS GUI: Configure Bundling Order Completion Criteria Defaults

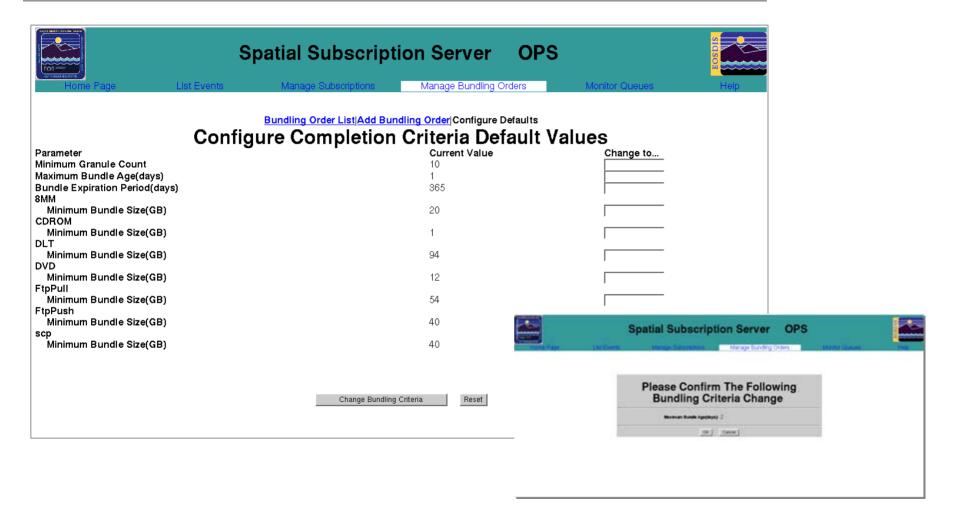

Spatial Subscription Server GUI List Action Queue Page

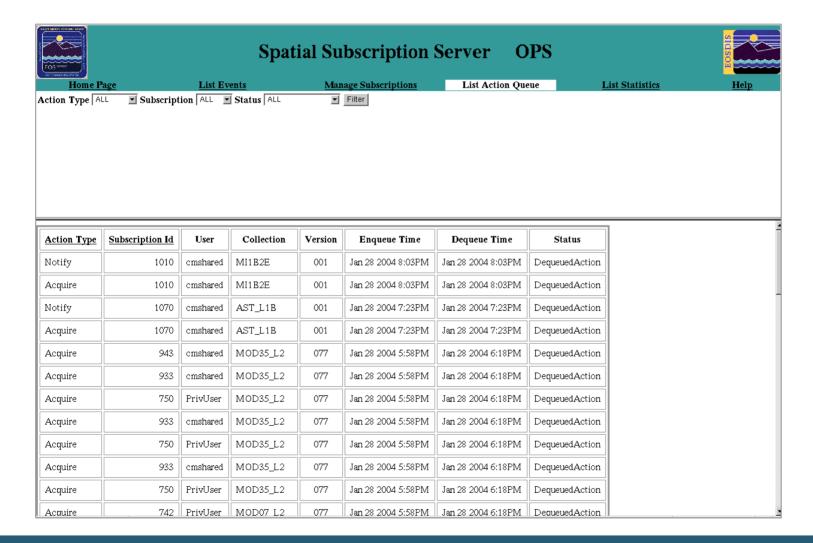

Spatial Subscription Server GUI List Statistics Page

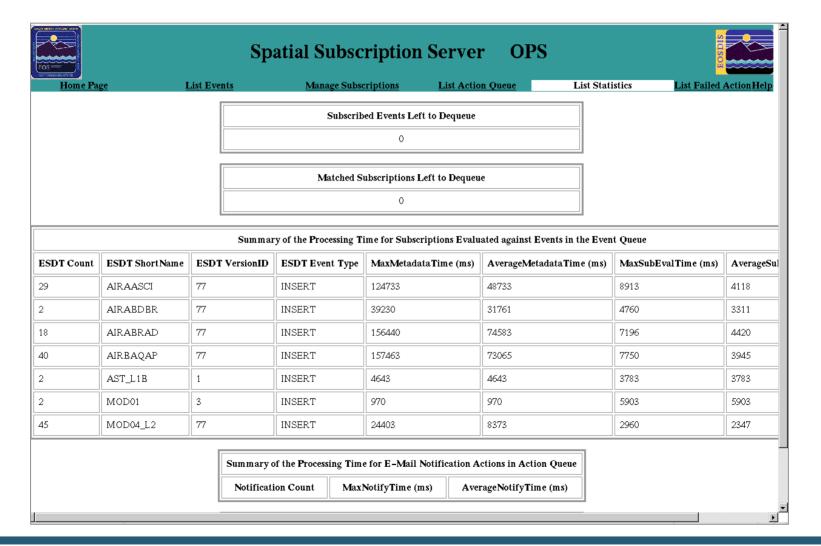

Spatial Subscription Server GUI List Failed Action Page

